

LAPORAN HASIL KERJA PRAKTEK

PEMBUATAN WEB E-LEARNING DINAS PARIWISATA

Diajukan Untuk Memenuhi Syarat Kuliah Kerja Praktik

Program Strata 1 Jurusan Teknologi Informasi Fakultas Teknik



Oleh:

HESTI MEDIA TAMA

20170140124

PROGRAM STUDI TEKNOLOGI INFORMASI

FAKULTAS TEKNIK

UNIVERSITAS MUHAMMADIYAH YOGYAKARTA

2020

**LEMBAR PENGESAHAN
LAPORAN KERJA PRAKTEK**

Di

PT RAZEN TEKNOLOGI INDONESIA

Periode 19 Oktober 2020– 20 November 2020

**Pembuatan dan Pengembangan Website E-Learning Dinas Pariwisata Menggunakan
Framework Laravel**

Disusun oleh:

Hesti Media Tama

20170140124

Yogyakarta, 31 Desember 2020

Mengesahkan,

**DOSEN PEMBIMBING KERJA PRAKTEK SELAKU
KETUA JURUSAN TEKNOLOGI INFORMASI**



Asroni, S.T., M.Eng.

NIDN. 0526047401

KATA PENGANTAR

Alhamdulillah rabbi 'alamin, Segala puji dan syukur penulis panjatkan kepada Allah SWT. karena-Nya pelaksanaan dan penyusunan laporan Kerja Praktek (KP) yang berjudul “Pembuatan Website E-learning Dinas Pariwisata” dapat diselesaikan dengan lancar.

Laporan Kerja Praktek ini adalah sebagai syarat untuk memenuhi tugas mata kuliah wajib pada Jurusan Teknologi Informasi, Fakultas Teknik, Universitas Muhammadiyah Yogyakarta. Penulis menyadari bahwa penulisan laporan Kerja Praktik ini terwujud berkat uluran tangan dari berbagai pihak.

Pada kesempatan ini, penulis ingin mengucapkan terimakasih kepada semua pihak yang telah membantu, khususnya kepada :

1. Allah SWT atas segala tuntunan, kemudahan, kesehatan , dan keselamatan yang di berikan kepada penulis selama pelaksanaan kerja praktik dan penulisan laporan kerja praktik sehingga semuanya dapat terselsaikan dengan baik dan lancar.
2. Orang tua dan keluarga yang tidak lelah memberikan motivasi dan dukungan kepada penulis dalam menyelsaikan kerja praktik ini.
3. Seluruh Dewan Direksi dan Staff PT Razen Teknologi Indonesia, yang telah memberi kesempatan untuk penulis bisa melaksanakan kerja praktek.
4. Bapak Didik selaku kepala Human Resources Developmen IT PT Razen Teknologi Indonesia Yang telah memberikan kesempatan penulis untuk kerja praktek.
5. Bapak Akhmad Mubaroki selaku Direktur Pengembangan Produk IT dan Pembimbing Project.
6. Bapak Ir. Asroni, S.T., M.Eng. selaku Ketua Jurusan Teknologi Informasi Universitas Muhamadiyah Yoyakarta dan juga selaku Dosen Pembimbing kerja praktek.
7. Teman-teman angkatan 2017 TI yang telah memberikan banyak bantuan dan support kepada penulis sehingga laporan ini bisa diselesaikan dengan sangat baik.
8. Muhammad Habil selaku teman hidup yang telah memberikan dorongan moril dan material, tempat berkeluh kesah dan support system penulis sehingga website Pembuatan dan Pengembangan Website E-Learning Dinas Pariwisata Menggunakan Framework Laravel dan laporan kerja praktek ini bisa dilakukan dengan baik dan lancar.
9. Vinanda Avin dan Hanif Abdillah selaku kakak tingkat yang telah memberitahu dan memberikan support kepada penulis mengenai tempat kerja praktek ini.
10. Kepada semua pihak yang telah berkenan memberikan bantuan dan dorongan serta kerja sama yang baik, sehingga laporan ini dapat diselesaikan dengan lancar.

Penulis menyadari bahwa masih banyak kekurangan dari laporan ini, baik dari materi maupun teknik penyajiannya, mengingat kurangnya pengetahuan dan pengalaman penulis. Oleh karena itu, kritik dan saran yang membangun sangat penulis harapkan. Demikian yang dapat penulis tuliskan, berharap semoga laporan ini dapat bermanfaat bagi penulis sendiri dan orang yang membacanya.

Yogyakarta, 20 Desember 2020

A handwritten signature in black ink, consisting of several stylized, overlapping loops and lines, positioned above the printed name.

Hesti Media Tama

DAFTAR ISI

LEMBAR PENGESAHAN	2
KATA PENGANTAR	3
DAFTAR ISI.....	5
Daftar Gambar	6
BAB I PENDAHULUAN.....	7
1.1 Latar Belakang.....	7
1.2 Rumusan Masalah.....	7
1.3 Tujuan.....	7
1.4 Manfaat.....	8
1.5 Waktu dan Tempat Pelaksanaan Magang.....	8
BAB II LANDASAN TEORI.....	10
BAB III PERANCANGAN	13
BAB IV IMPLEMENTASI	15
BAB V KESIMPULAN DAN SARAN	21
5.2.1 Bagi Apps Developer.....	21
5.2.2 Bagi user.....	21
LAMPIRAN.....	22

Daftar Gambar

Gambar 1 database.....	15
Gambar 2 login	15
Gambar 3 dashboard admin	16
Gambar 4 materi	17
Gambar 5 tambah data materi	17
Gambar 6 CRUD Member	18
Gambar 7 Tambah data member	19
Gambar 8 Edit data member	19
Gambar 9 Delete data member	20
Gambar 10 Logout	20

BAB I

PENDAHULUAN

1.1 Latar Belakang

Dinas Kebudayaan dan Pariwisata merupakan unsur pelaksana urusan pemerintahan bidang kebudayaan dan bidang pariwisata yang menjadi kewenangan daerah. Fungsi dari dinas pariwisata sangatlah penting untuk berlangsungnya segala hal yang berkaitan dengan pariwisata di seluruh daerah Indonesia.

Oleh karena itu, dinas pariwisata harus memiliki sumber daya manusia yang kompeten dalam segala bidanga yang diperlukan, karena hal tersebut berbanding lurus dengan baik atau buruknya semua program dinas pariwisata dijalankan. Untuk mengatasi kurangnya kompetensi dalam hal tertentu yang belum dipelajari oleh pegawai dinas pariwisata, maka dibuatlah sebuah website yang berisi materi-materi atau modul kompetensi yang ditargetkan untuk pegawai dinas pariwisata.

Website ini didesain dan dikembangkan oleh PT. RAZEN TEKNOLOGI INDONESIA, dimana perusahaan ini sudah berpengalaman sudah mengatasi berbagai macam keluhan yang bersifat sistem teknologi informasi. Website E-learning dinas pariwisata ini adalah projek yang didesain, dikerjakan dan dikembangkan langsung oleh programmer-programmer yang handal dan berpengalaman. Harapannya website ini bisa membantu kinerja dari pegawai dinas pariwisata dan juga memudahkan admin pegawai untuk memberikan materi secara cepat dan daring.

1.2 Rumusan Masalah

Berdasarkan latar belakang di atas, maka dapat dirumuskan permasalahan yang ada pada kompetensi yang ada di dinas pariwisata adalah:

1. Bagaimana mengembangkan sebuah aplikasi yang memudahkan pengguna mendapatkan dan mengisi data secara efisien?
2. Bagaimana sebuah aplikasi dapat dengan mudah membuat Login Administrator dan CRUD ?

1.3 Tujuan

Adapun tujuan dari pembuatan web ini yaitu:

1. Memberikan kemudahan dengan tampilan yang modern dan mudah dipahami dengan mencantumkan data sesuai sesuai dengan nama pegawai.
2. Mempermudah akses CRUD.

1.4 Manfaat

1.4.1 Bagi Mahasiswa

1. Memiliki pengalaman terlibat langsung dalam aktivitas industri, serta mendapatkan kesempatan untuk mengaplikasikan ilmu – ilmu yang didapat saat di perkuliahan.
2. Mengembangkan wawasan pola pikir dan menganalisa dan mengantisipasi suatu probematika dengan mengacu pada materi teoritis dari disiplin ilmu yang ditempuh. Sehingga mampu menghadapi berbagai problema di suatu aplikasi.
3. Mampu mengembangkan kemampuan ide – ide kreatif dan inovatif.

1.4.2 Bagi Universitas Muhammadiyah Yogyakarta

1. Merupakan masukan dalam penyempurnaan kualitas pendidikan untuk masa sekarang dan masa yang akan datang.
2. Sebagai perbandingan sejauh mana kurikulum Pendidikan pada saat ini dengan kebutuhan perusahaan.

1.4.3 Bagi Perusahaan

1. Mengetahui metode – metode baru yang diperoleh dari materi diperkuliahan yang dapat diaplikasikan pada perusahaan tersebut.
2. Menambah relasi perusahaan dengan instansi Pendidikan, yang dalam hal ini adalah Universitas Muhammadiyah Yogyakarta.

1.5 Waktu dan Tempat Pelaksanaan Magang

1.5.1 Lokasi Pelaksanaan Magang

Kegiatan magang dilakukan selama 1 bulan. Adapun keterangan mengenai lokasi magang sebagai berikut:

Nama Instansi : PT. Razen Teknologi Indonesia

Alamat : Jl. Perhutut No. 14 Sono Malangrejo 001/033 Wedo Martani,
Kecamatan Ngemplak, Kabupaten Sleman, Daerah Istimewa
Yogyakarta.

1.5.2 Waktu Pelaksanaan Magang

Pelaksanaan kegiatan kerja praktik dilakukan selama 30 hari kerja, dimulai pada tanggal 19 Oktober – 20 November 2020. Pengerjaan website ini dilakukan secara *wfh*.

Wfh adalah model atau perjanjian kerja di mana karyawan memperoleh fleksibilitas bekerja dalam hal tempat dan waktu kerja dengan bantuan teknologi telekomunikasi.

BAB II

LANDASAN TEORI

2.1 *Laravel*

Laravel adalah kerangka kerja aplikasi web berbasis PHP yang sumber terbuka, menggunakan konsep Model-View-Controller. Laravel berada dibawah lisensi MIT, dengan menggunakan GitHub sebagai tempat berbagi kode.

2.2 *Framework*

Framework aplikasi adalah desain dan program kerangka aplikasi yang digunakan untuk membangun aplikasi-aplikasi yang sejenis. Framework memiliki banyak pustaka tingkat tinggi yang dapat digunakan secara berulang. Umumnya framework perangkat lunak didesain secara berorientasi objek sehingga desain dan programnya tersedia sebagai class-class abstract. Framework aplikasi mendefinisikan arsitektur aplikasi sehingga penambahan fungsi-fungsi lain dapat dilakukan dengan menambah modul-modul tanpa perlu memodifikasi kode program yang sudah ada (kecuali file-file konfigurasi (Basuki, 2010)).

2.3 *PHP*

PHP (Hypertext Preprocessor) adalah bahasa pemrograman berbasis website pada umumnya. PHP banyak dipakai untuk memprogram website dinamis. Tujuan utama penggunaan bahasa ini adalah untuk memungkinkan pengguna sebagai developer dapat membuat website dinamis. Program ini bisa menghubungkan antara database yang tersedia dengan tujuan menampilkan data yang ada didalam database kedalam halaman website yang akan ditampilkana oleh peramban. PHP adalah bahasa pemrograman server-side script yang dirancang untuk pengembangan Web (Welling & Thomson, 2009). Program ini dapat berdiri sendiri ataupun disisipkan di antara kode-kode html sehingga dapat langsung ditampilkan bersama dengan kode-kode html.

2.4 *HTML*

HTML singkatan dari HyperText Markup Language yaitu sebuah bahasa markup yang digunakan untuk membuat sebuah halaman website, menampilkan berbagai informasi di dalam sebuah penjelajah Internet dan formating hypertext sederhana yang ditulis kedalam berkas format ASCII (American Standard Code For Information

Interchange) agar dapat menghasilkan tampilan wujud yang terintegrasi. (Meloni, 2012) 9 Menurut Meloni (2012), HTML adalah bahasa yang digunakan untuk menjelaskan bagaimana teks, grafik, dan data-data yang mengandung informasi lain dapat diorganisir dan dihubungkan satu dengan yang lain. HTML (Hyper Text Markup Language) merupakan bahasa pemrograman website yang memiliki sintak atau aturan tertentu dalam menuliskan script atau kode-kode, sehingga peramban dapat menampilkan informasi dengan membaca kode-kode HTML

2.5 Cascading Style Sheet (CSS)

Cascading Style Sheet (CSS) merupakan bahasa yang didefinisikan untuk mengkonstruksi huruf, warna, dan posisi, dimana dapat digunakan untuk mendeskripsikan bagaimana informasi pada suatu halaman web dapat dibentuk dan ditampilkan. CSS dapat disimpan langsung dalam halaman HTML atau dalam file yang terpisah (Meloni, 2012) CSS (Cascading Style Sheet) digunakan untuk membantu dalam mendesain isi halaman web. Ketika anda memiliki sebuah halaman web yang terdiri dari beberapa file, untuk melakukan pemformatan pada halaman tersebut, anda tidak perlu memformat satu persatu, tetapi anda cukup membuat satu file di CSS. CSS dapat dipasang pada dokumen HTML yang telah jadi (Meloni, 2012).

CSS memiliki tiga bagian yaitu Selector, Properti dan Nilai. Penulisan property dan nilai dipisahkan oleh tanda titik-dua (:), jika nilai terdiri dari satu kata, penulisan nilai dapat dengan tanda petik dua, misalnya penulisan "Times New Roman".

2.6 JavaScript

JavaScript adalah sebuah bahasa pemrograman berbentuk script pada sebuah Website dimana kode-kode tersebut dieksekusi oleh browser. Menurut (Meloni, 2012), JavaScript dapat dimasukkan ke dalam dokumen HTML. JavaScript adalah bahasa pemrograman berbasis prototipe yang berjalan disisi klien. Jika kita berbicara dalam konteks website, sederhananya, kita dapat memahami JavaScript sebagai bahasa pemrograman yang berjalan khusus untuk diperamban atau halaman website agar halaman website menjadi lebih hidup (Meloni, 2012) Kalau dilihat dari suku katanya terdiri dari dua suku kata, yaitu Java dan Script. Java adalah Bahasa pemrograman berorientasi objek, sedangkan Script adalah serangkaian instruksi program.

2.7 My sql

MySQL merupakan sebuah Database Open Source populer di dunia. Database ini sering digunakan pada bahasa pemrograman yang juga populer seperti PHP dan Java. MySQL menggunakan bahasa SQL ketika ingin mengakses databasenya. Untuk memudahkan dalam mengaksesnya, kita cukup menggunakan software tertentu seperti phpMyAdmin atau mysql yog yang sudah tersedia untuk versi windows dan versi linux (Sofwan, 2006).

BAB III

PERANCANGAN

3.1. Alat dan Bahan

Dalam proses pembuatan web e-learning menggunakan alat dan bahan untuk mendukung berjalannya perancangan dan pembuatan website.

3.1.1. Alat

Alat yang digunakan untuk membuat aplikasi ini, berupa perangkat keras dan perangkat lunak yaitu :

a. Perangkat Keras

1. Intel Core i3-3217U 1.80GHz .
2. 10 GB Memory.
3. 500 GB HDD.
4. 128 GB SSD.
5. Keyboard, Mouse and Monitor.


b. Perangkat Lunak

1. Sistem Operasi Windows 10.
2. XAMPP.
3. Visual Studio Code.


3.1.2. Bahan

Bahan yang digunakan dalam proses pembuatan website ini adalah data yang disediakan oleh Staff Pembimbing Kerja Praktik PT. Razen Teknologi Indonesia


3.2. Use case diagram

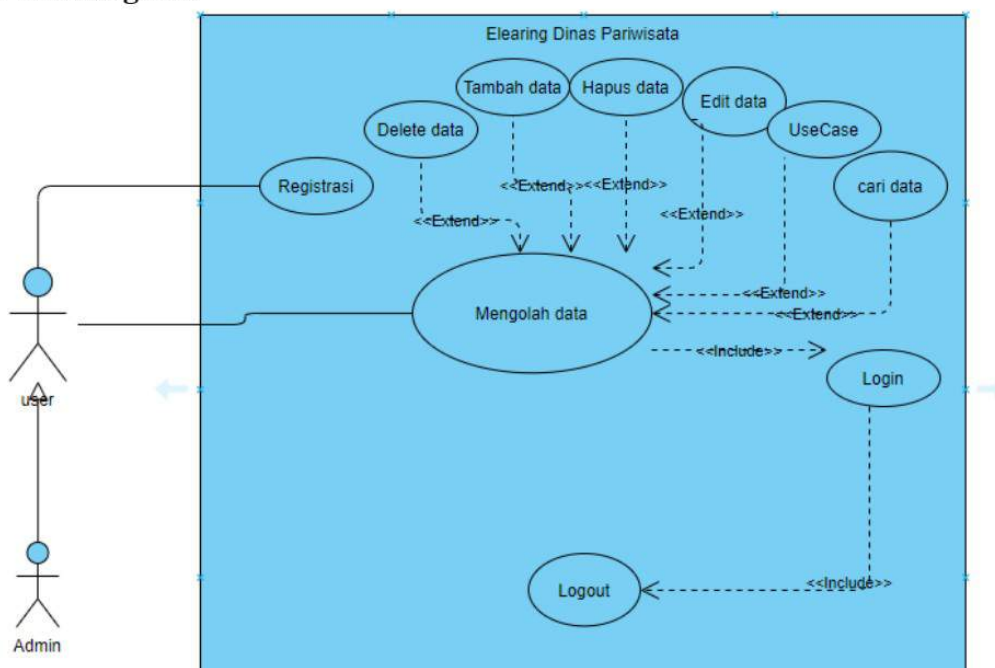

3.3. Class Diagram

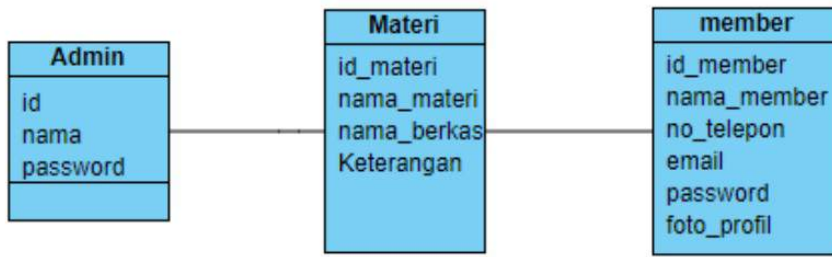

3.4. Entitas Relation Diagram

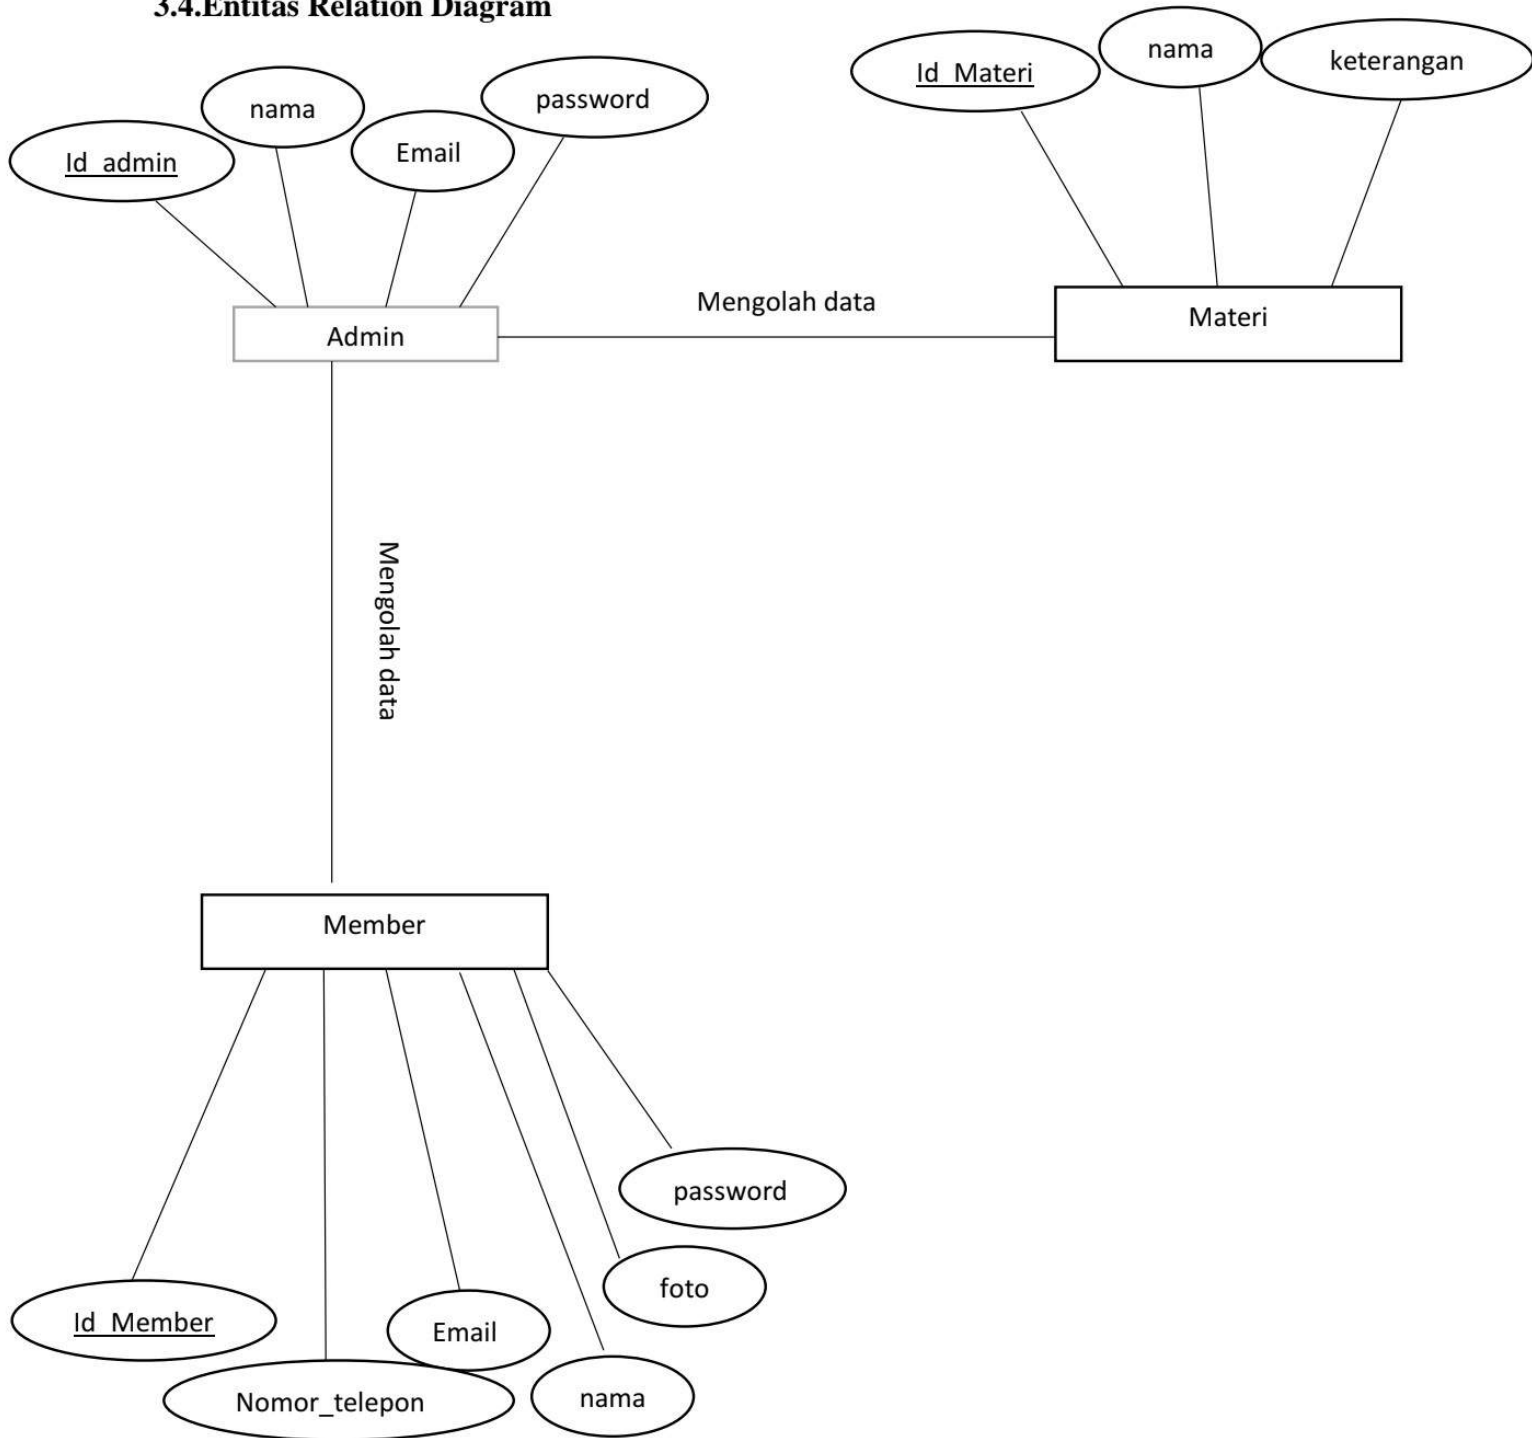


BAB IV

IMPLEMENTASI

4.2.1 Tampilan Database


Pada halaman ini adalah tampilan database bimtek. Ada 3 tabel yaitu tabel materi, table role dan tabel user, tabel role dan user digunakan untuk membuat Halaman Login sedangkan tabel materi digunakan untuk membuat crud materi.

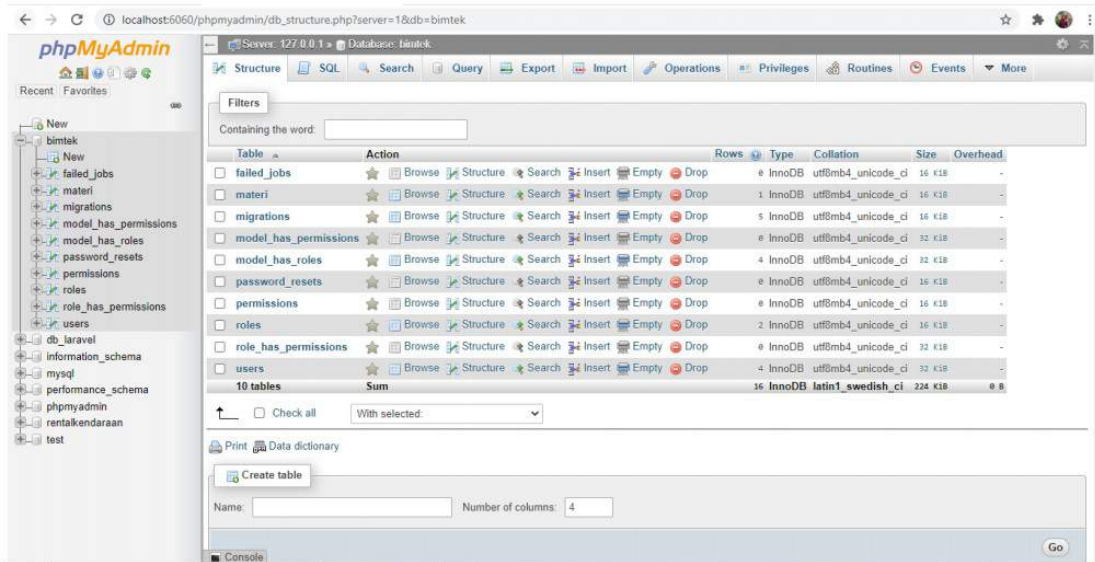

Gambar 1 database

4.2.2. Login


Pada halaman ini adalah tampilan login dari website dinas pariwisata. Admin dan User dapat mempunyai akun sendiri.

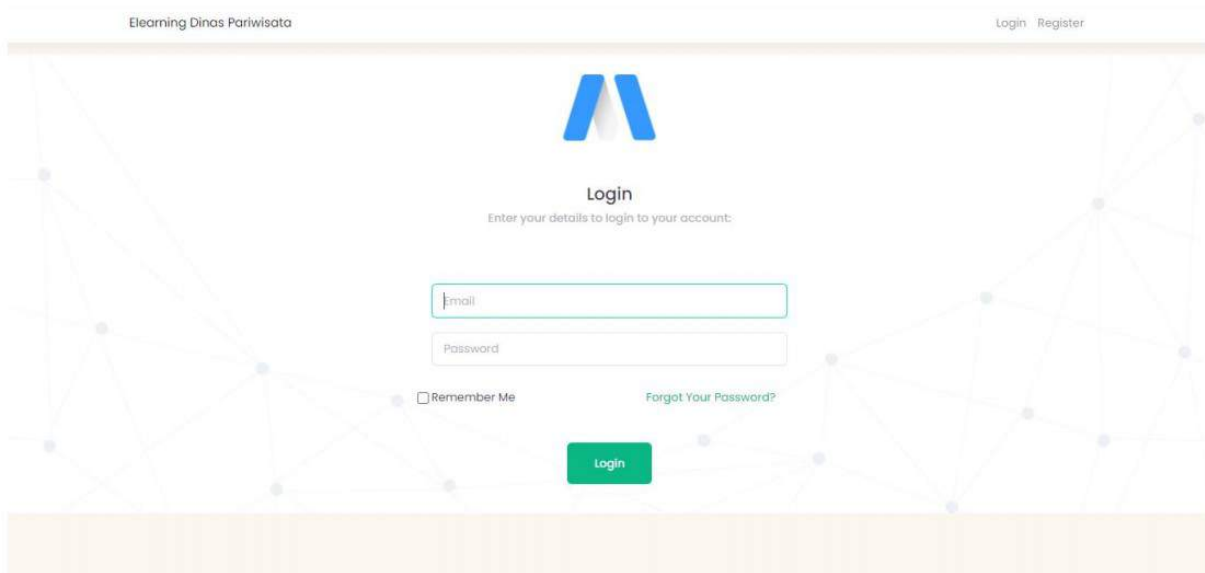

Gambar 2 login

4.2.3. Register

Pada halaman ini menampilkan registrasi untuk member mendaftarkan diri.

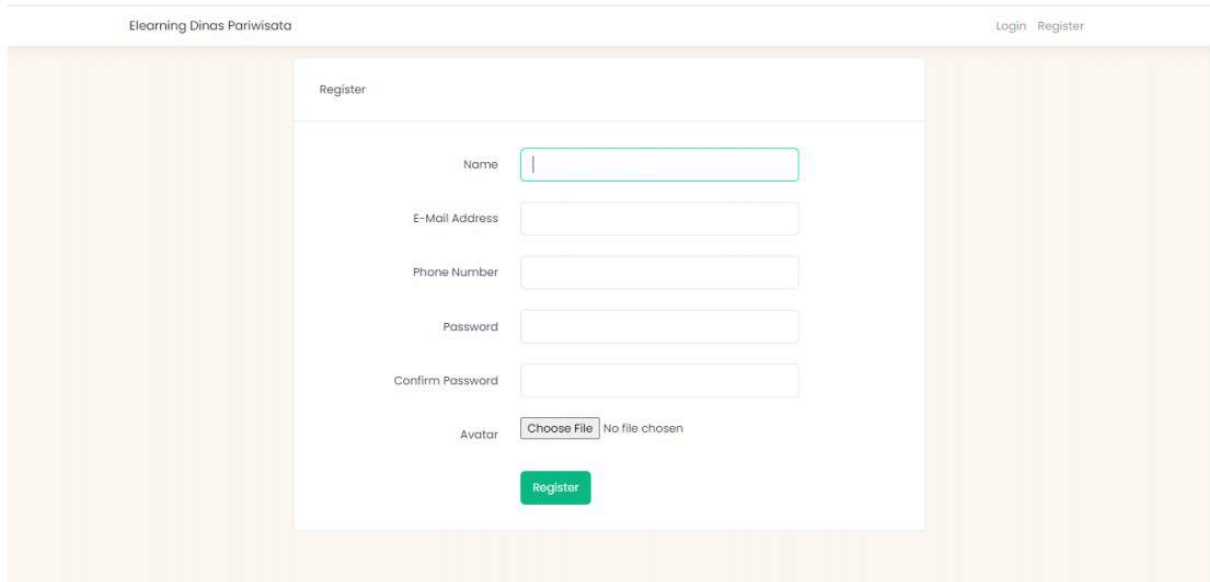

Register

Name

E-Mail Address

Phone Number


Password

Confirm Password

Avatar No file chosen

4.2.4. Dashboard Admin


Halaman ini menampilkan dasbor atau halaman utama admin dari website dinas pariwisata.

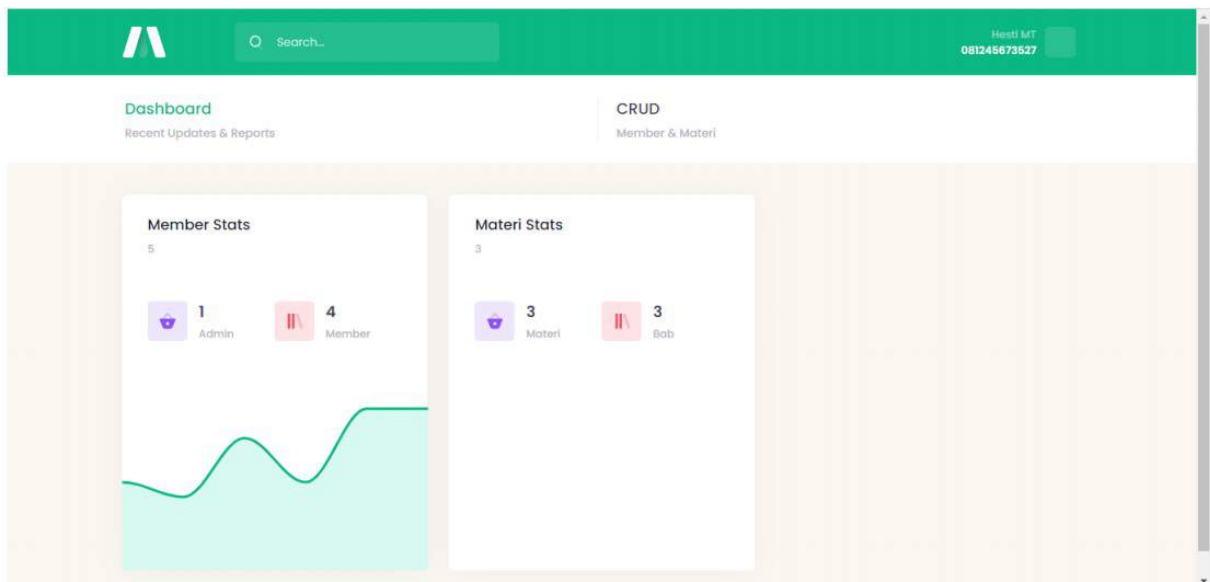


Gambar 3 dashboard admin

4.2.5 CRUD Materi


Pada halaman ini adalah tampilan menu materi. Didalamnya terdapat menu Daftar materi. Didalamnya admin dapat melakukan CRUD(Creat, Read, Update dan Delete) materi.

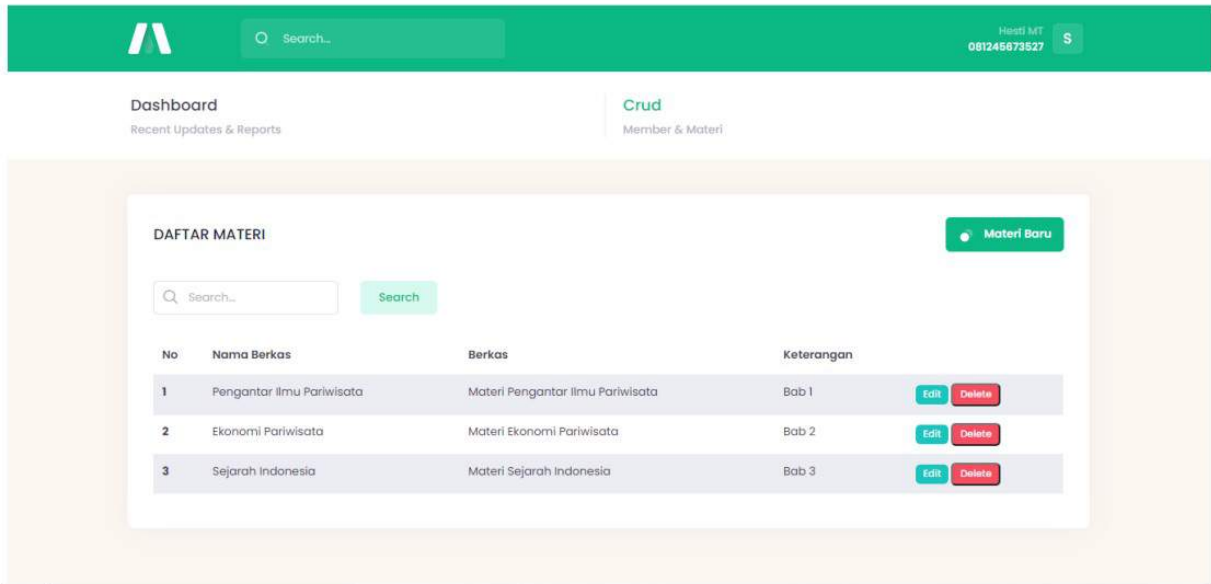

Gambar 4 materi

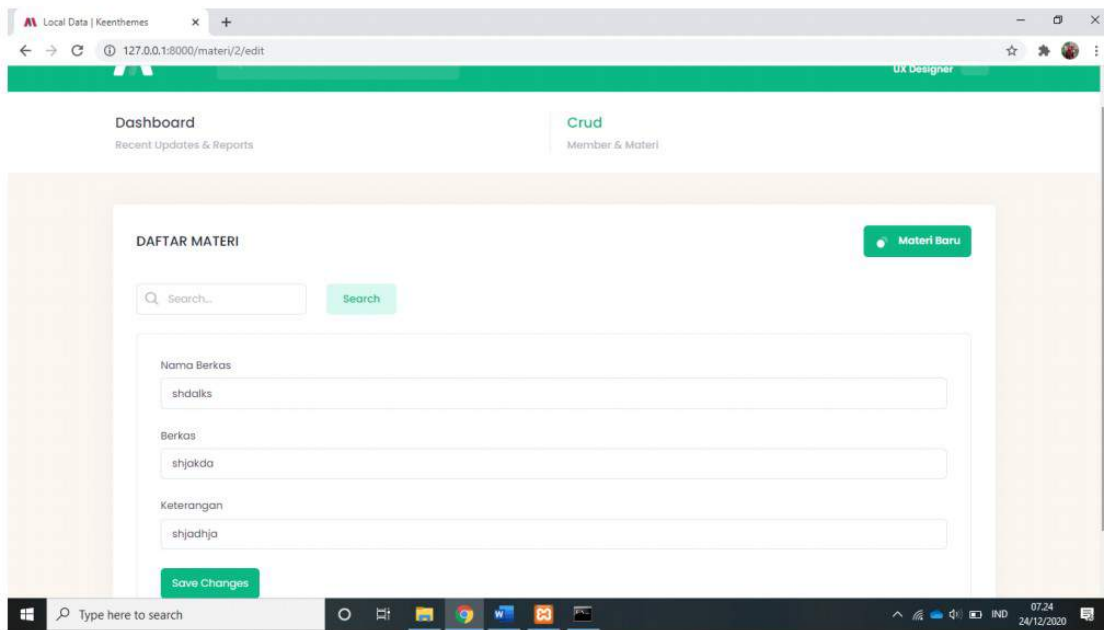


Gambar 5 tambah data materi

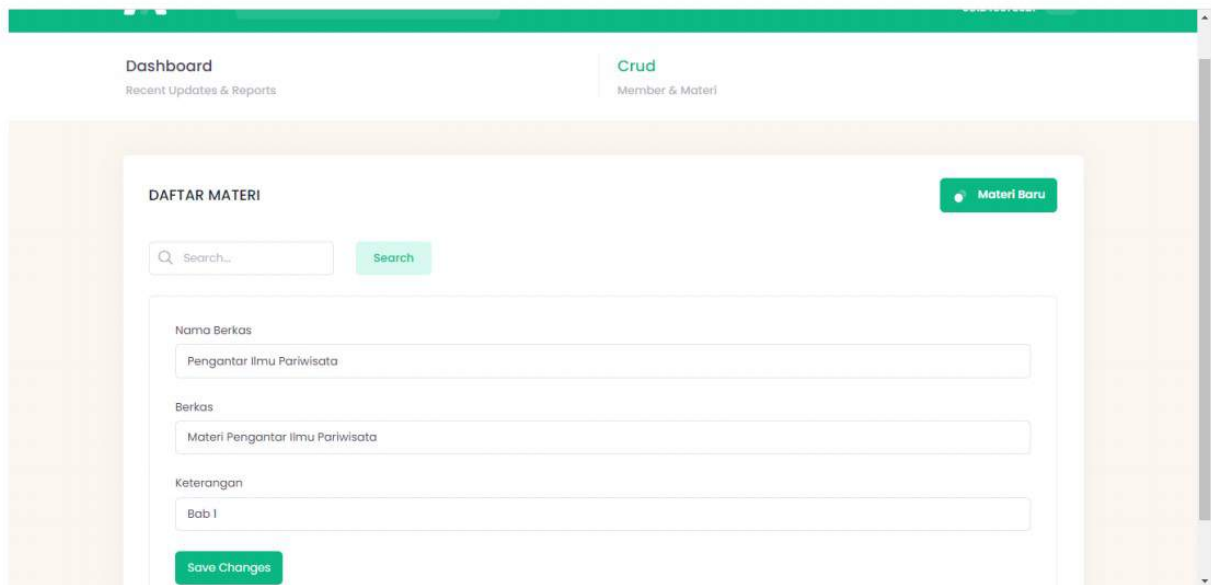


Gambar 6 edit materi

4.2.6 Tampilan menu member


Pada halaman ini adalah tampilan menu Daftar member di dalam member. Di dalamnya admin dapat CRUD (Create, Read, Update, Delete) member.

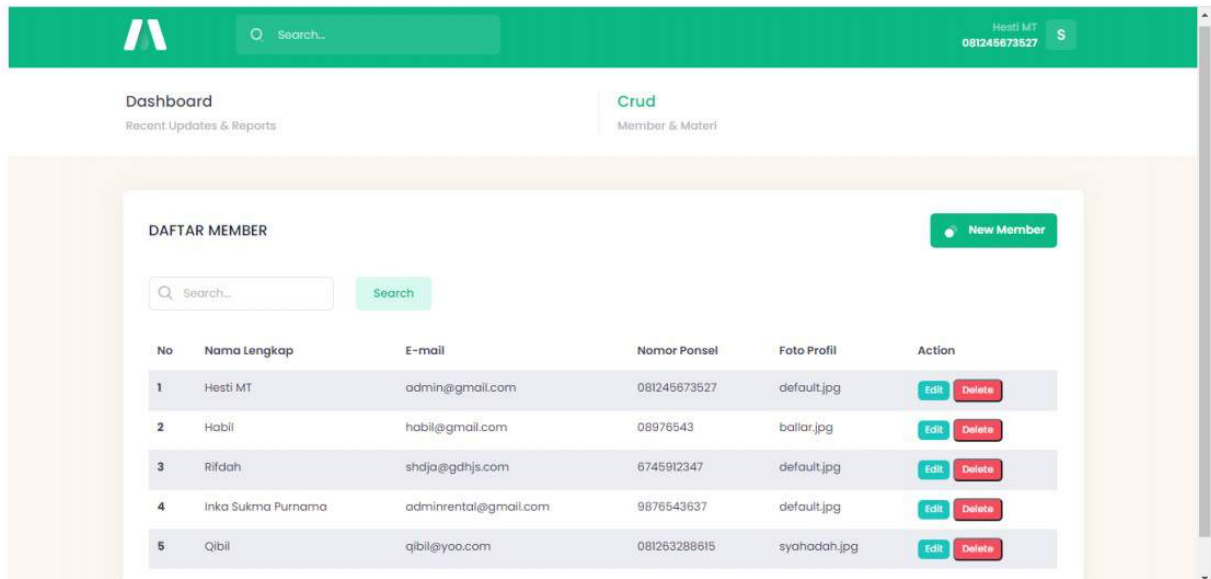


Gambar 7 CRUD Member

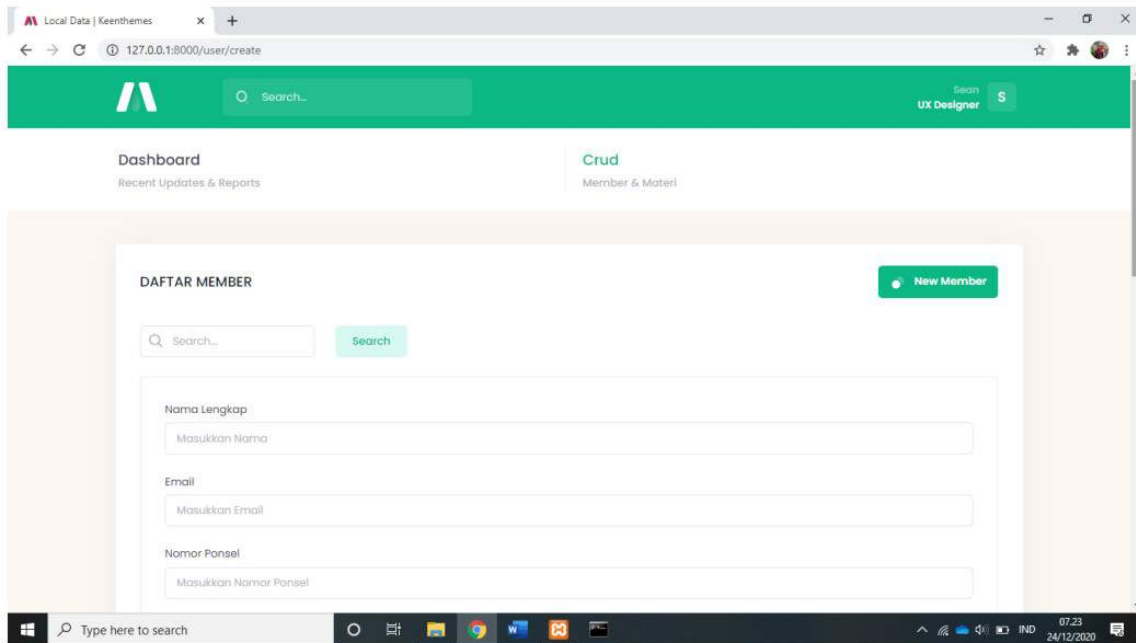

Gambar 8 Tambah data member

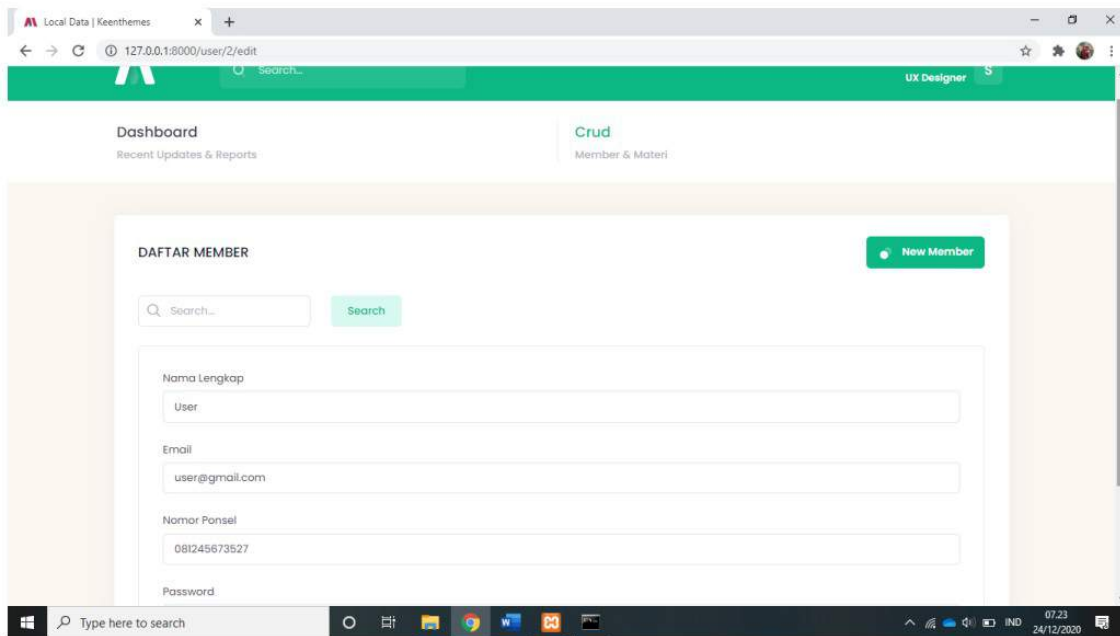


Gambar 9 Edit data member

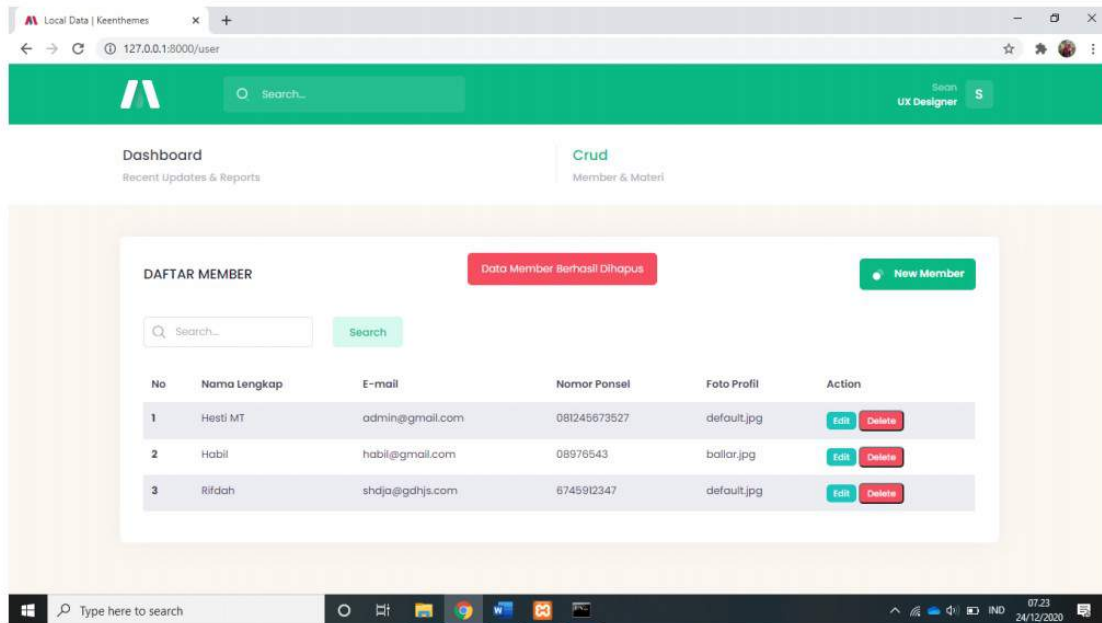

Gambar 10 Delete data member

4..2.7 Logout

Pada halaman ini adalah tampilan logout dari website dinas pariwisata.

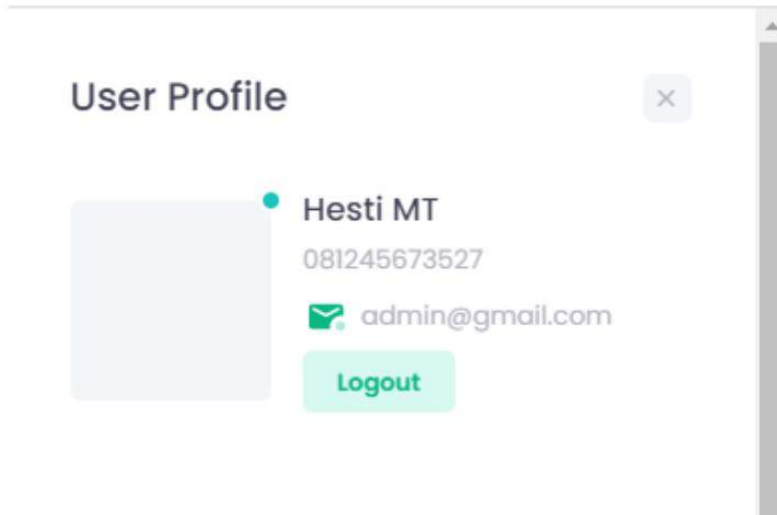

Gambar 11 Logout

BAB V

KESIMPULAN DAN SARAN

5.1 Kesimpulan

Setelah melakukan tahapan perancangan dan pembuatan sistem yang dibuat sudah mampu menangani kebutuhan seperti yang tercantum di rumusan masalah. Berdasarkan penelitian dapat disimpulkan bahwa:

1. Dengan adanya aplikasi ini, pegawai dapat terbantu dalam melakukan mengakses materi-materi yang telah diupload oleh admin dinas pariwisata.
2. Dapat meminimalkan kinerja saat melakukan pengolahan data.

5.2 Saran

Berdasarkan kesimpulan diatas, berikut merupakan saran yang dijadikan bahan pertimbangan untuk meningkatkan kinerja pegawai dinas pariwisata:

5.2.1 Bagi Apps Developer

Dengan adanya aplikasi ini, diharapkan ada upaya pengembangan lebih lanjut dengan fitur – fitur terbaru yang nantinya semakin lebih sempurna dan pengamanan data pribadi lebih terjamin.

5.2.2 Bagi user

Dengan adanya aplikasi ini, diharapkan pengguna dapat meninjau aplikasi yang masih terdapat kekurangan atau kesalahan.

LAMPIRAN

The screenshot shows the phpMyAdmin interface for the 'bimtek' database. The left sidebar displays a tree view of the database structure, including tables like 'failed_jobs', 'materi', 'migrations', 'model_has_permissions', 'password_resets', 'permissions', 'roles', 'role_has_permissions', 'users', 'db_laravel', 'information_schema', 'mysql', 'performance_schema', 'phpmyadmin', 'rentalkendaraan', and 'test'. The main area shows a table structure overview for 10 tables. Below this, there is a 'Create table' form with a 'Name' field and a 'Number of columns' field set to 4.

Table	Action	Rows	Type	Collation	Size	Overhead
failed_jobs	[Browse] [Structure] [Search] [Insert] [Empty] [Drop]	0	InnoDB	utf8mb4_unicode_ci	16 K1B	-
materi	[Browse] [Structure] [Search] [Insert] [Empty] [Drop]	3	InnoDB	utf8mb4_unicode_ci	16 K1B	-
migrations	[Browse] [Structure] [Search] [Insert] [Empty] [Drop]	5	InnoDB	utf8mb4_unicode_ci	16 K1B	-
model_has_permissions	[Browse] [Structure] [Search] [Insert] [Empty] [Drop]	0	InnoDB	utf8mb4_unicode_ci	32 K1B	-
model_has_roles	[Browse] [Structure] [Search] [Insert] [Empty] [Drop]	4	InnoDB	utf8mb4_unicode_ci	16 K1B	-
password_resets	[Browse] [Structure] [Search] [Insert] [Empty] [Drop]	0	InnoDB	utf8mb4_unicode_ci	16 K1B	-
permissions	[Browse] [Structure] [Search] [Insert] [Empty] [Drop]	0	InnoDB	utf8mb4_unicode_ci	16 K1B	-
roles	[Browse] [Structure] [Search] [Insert] [Empty] [Drop]	2	InnoDB	utf8mb4_unicode_ci	16 K1B	-
role_has_permissions	[Browse] [Structure] [Search] [Insert] [Empty] [Drop]	0	InnoDB	utf8mb4_unicode_ci	32 K1B	-
users	[Browse] [Structure] [Search] [Insert] [Empty] [Drop]	5	InnoDB	utf8mb4_unicode_ci	32 K1B	-
10 tables	Sum	19	InnoDB	latin1_swedish_ci	224 K1B	0 B

The screenshot shows the 'Table: materi' view in phpMyAdmin. The table contains 3 rows of data. The SQL query shown is 'SELECT * FROM `materi`'. The table structure is as follows:

id	nama_berkas	berkas	keterangan	remember_token	created_at	updated_at
2	Pengantar Ilmu Pariwisata	Materi Pengantar Ilmu Pariwisata	Bab 1	NULL	2020-12-01 15:57:26	2020-12-31 03:42:15
4	Ekonomi Pariwisata	Materi Ekonomi Pariwisata	Bab 2	NULL	2020-12-29 10:58:32	2020-12-31 03:43:23
5	Sejarah Indonesia	Materi Sejarah Indonesia	Bab 3	NULL	2020-12-29 11:36:40	2020-12-31 03:45:50

Server: 127.0.0.1 Database: bimtek Table: users

Showing rows 0 - 4 (5 total, Query took 0.0022 seconds.)

SELECT * FROM 'users'

Number of rows: 25 Filter rows: Search this table Sort by key: None

	id	name	email	no_ponsel	email_verified_at	avatar	password
<input type="checkbox"/>	1	Hesti MT	admin@gmail.com	081245673527	NULL	default.jpg	\$2y\$10\$vnfAcYy5uetudoH7psnumerKD4ILUGPICYLhVv...
<input type="checkbox"/>	4	Habil	habil@gmail.com	08976543	NULL	ballar.jpg	\$2y\$10\$6AsoLQ7ZyNpLcmzkUQ2shO.VtO1qk8HgHJEIBz...
<input type="checkbox"/>	15	Rifdah	shdja@gdhjs.com	6745912347	NULL	default.jpg	12344321
<input type="checkbox"/>	16	Inka Sukma Purnama	adminrental@gmail.com	9876543637	NULL	default.jpg	12344321
<input type="checkbox"/>	17	Qibil	qibil@yoo.com	081263288615	NULL	syahadah.jpg	\$2y\$10\$xFZYbxFasLdYV70Zivsauk1e5Ku7EmOaJaEm...

Check all With selected: Edit Copy Delete Export

Number of rows: 25 Filter rows: Search this table Sort by key: None

Server: 127.0.0.1 Database: bimtek Table: roles

Showing rows 0 - 1 (2 total, Query took 0.0022 seconds.)

SELECT * FROM 'roles'

Number of rows: 25 Filter rows: Search this table Sort by key: None

	id	name	guard_name	created_at	updated_at
<input type="checkbox"/>	1	admin	web	2020-11-19 13:14:25	2020-11-19 13:14:25
<input type="checkbox"/>	2	user	web	2020-11-19 13:14:25	2020-11-19 13:14:25

Check all With selected: Edit Copy Delete Export

Number of rows: 25 Filter rows: Search this table Sort by key: None

Query results operations

Print Copy to clipboard Export Display chart Create view

env - Elearning_pariwisata - Visual Studio Code

```

1 APP_NAME=Laravel
2 APP_ENV=local
3 APP_KEY=base64:SLtrIwOkKmQd+FM/05zUHZsSrEvjgPFLMLZvr4aA=
4 APP_DEBUG=true
5 APP_URL=http://localhost
6
7 LOG_CHANNEL=stack
8 LOG_LEVEL=debug
9
10 DB_CONNECTION=mysql
11 DB_HOST=127.0.0.1
12 DB_PORT=3306
13 DB_DATABASE=bimtek
14 DB_USERNAME=root
15 DB_PASSWORD=
16
17 BROADCAST_DRIVER=log
18 CACHE_DRIVER=file
19 QUEUE_CONNECTION=sync
20 SESSION_DRIVER=file
21 SESSION_LIFETIME=120
22
23 REDIS_HOST=127.0.0.1
24 REDIS_PASSWORD=null
25 REDIS_PORT=6379
26
27 MAIL_MAILER=smt
28 MAIL_HOST=smt.mailtrap.io
29 MAIL_PORT=2525
30 MAIL_USERNAME=null
31 MAIL_PASSWORD=null
32 MAIL_ENCRYPTION=null
33 MAIL_FROM_ADDRESS=null
  
```

Ln 13, Col 19 Spaces: 4 UTF-8 LF Plain Text

The screenshot shows the Visual Studio Code interface with the Explorer view on the left displaying the project structure. The file explorer is expanded to show the `.env` file. The main editor window displays the contents of the `.env` file, which contains various environment variables for database, mail, and AWS services.

```
48 CACHE_DRIVER=file
19 QUEUE_CONNECTION=sync
28 SESSION_DRIVER=file
21 SESSION_LIFETIME=120
22
23 REDIS_HOST=127.0.0.1
24 REDIS_PASSWORD=null
25 REDIS_PORT=6379
26
27 MAIL_MAILER=smtp
28 MAIL_HOST=smtp.mailtrap.io
29 MAIL_PORT=2525
30 MAIL_USERNAME=null
31 MAIL_PASSWORD=null
32 MAIL_ENCRYPTION=null
33 MAIL_FROM_ADDRESS=null
34 MAIL_FROM_NAME="{APP_NAME}"
35
36 AWS_ACCESS_KEY_ID=
37 AWS_SECRET_ACCESS_KEY=
38 AWS_DEFAULT_REGION=us-east-1
39 AWS_BUCKET=
40
41 PUSHER_APP_ID=
42 PUSHER_APP_KEY=
43 PUSHER_APP_SECRET=
44 PUSHER_APP_CLUSTER=mt1
45
46 MIX_PUSHER_APP_KEY="{PUSHER_APP_KEY}"
47 MIX_PUSHER_APP_CLUSTER="{PUSHER_APP_CLUSTER}"
48
```

The screenshot shows the Visual Studio Code interface with the Explorer view on the left displaying the project structure. The file explorer is expanded to show the `routes/api.php` file. The main editor window displays the contents of the `routes/api.php` file, which includes the registration of an API route for the `/user` endpoint.

```
1 <?php
2
3 use Illuminate\Http\Request;
4 use Illuminate\Support\Facades\Route;
5
6 /*
7 |-----
8 | API Routes
9 |-----
10 |
11 | Here is where you can register API routes for your application. These
12 | routes are loaded by the RouteServiceProvider within a group which
13 | is assigned the "api" middleware group. Enjoy building your API!
14 |
15 | */
16
17 Route::middleware('auth:api')->get('/user', function (Request $request) {
18     return $request->user();
19 });
20
```

The screenshot shows the Visual Studio Code interface with the Explorer view on the left displaying the project structure. The file explorer is expanded to show the `channels.php` file. The main editor window displays the contents of the `channels.php` file, which includes the registration of a broadcast channel for the `App\Models\User` model.

```
1 <?php
2
3 use Illuminate\Support\Facades\Broadcast;
4
5 /*
6 |-----
7 | Broadcast Channels
8 |-----
9 |
10 | Here you may register all of the event broadcasting channels that your
11 | application supports. The given channel authorization callbacks are
12 | used to check if an authenticated user can listen to the channel.
13 |
14 | */
15
16 Broadcast::channel('App.Models.User.{id}', function ($user, $id) {
17     return (int) $user->id === (int) $id;
18 });
19
```



```

File Edit Selection View Go Run Terminal Help console.php - Elearning_pariwisata - Visual Studio Code
EXPLORER welcome.blade.php console.php X
ELEARNING_PARIWISATA routes > console.php > ...
  > css
  > js
  > lang
  > sass
  > views
  > auth
  > layouts
  admin.blade.php
  app.blade.php
  login.blade.php
  master.blade.php
  materi
  create.blade.php
  edit.blade.php
  index.blade.php
  user
  create.blade.php
  edit.blade.php
  index.blade.php
  home.blade.php
  welcome.blade.php
  routes
  api.php
  channels.php
  console.php
  web.php
  > OUTLINE
  > NPM SCRIPTS
1 <?php
2
3 use Illuminate\Foundation\Inspiring;
4 use Illuminate\Support\Facades\Artisan;
5
6 /*
7 -----
8 | Console Routes
9 | -----
10 |
11 | This file is where you may define all of your Closure based console
12 | commands. Each Closure is bound to a command instance allowing a
13 | simple approach to interacting with each command's IO methods.
14 |
15 | */
16
17 Artisan::command('inspire', function () {
18     $this->comment(Inspiring::quote());
19 })->purpose('Display an inspiring quote');
20

```

```

File Edit Selection View Go Run Terminal Help web.php - Elearning_pariwisata - Visual Studio Code
EXPLORER web.php X
ELEARNING_PARIWISATA routes > web.php > ...
  create.blade.php
  edit.blade.php
  index.blade.php
  user
  create.blade.php
  edit.blade.php
  index.blade.php
  home.blade.php
  welcome.blade.php
  routes
  api.php
  channels.php
  console.php
  web.php
  storage
  app
  > framework
  > logs
  > tests
  > vendor
  .editorconfig
  .env
  .env.example
  .gitattributes
  .gitignore
  .styleci.yml
  > OUTLINE
  > NPM SCRIPTS
1 <?php
2
3 use Illuminate\Support\Facades\Auth;
4 use Illuminate\Support\Facades\Route;
5
6 Route::get('/', function () {
7     return view('welcome');
8 });
9
10
11 Auth::routes();
12
13 Route::get('/home', [App\Http\Controllers\HomeController::class, 'index'])->name('home');
14 Route::middleware('role:admin')->get('/dashboard', [App\Http\Controllers\HomeController::class, 'index'])->name('dash');
15
16 Route::prefix('user')->group(function(){
17     Route::get('/', [App\Http\Controllers\UserController::class, 'index'])->name('user');
18     Route::get('/create', [App\Http\Controllers\UserController::class, 'create']);
19     Route::post('/', [App\Http\Controllers\UserController::class, 'store']);
20     Route::delete('/users', [App\Http\Controllers\UserController::class, 'destroy']);
21     Route::get('/{id}/edit', [App\Http\Controllers\UserController::class, 'edit']);
22     Route::post('/{id}/update', [App\Http\Controllers\UserController::class, 'update'])->name('update');
23 });
24
25 Route::prefix('materi')->group(function(){
26     Route::get('/', [App\Http\Controllers\MateriController::class, 'index'])->name('materi');
27     Route::get('/create', [App\Http\Controllers\MateriController::class, 'create']);
28     Route::post('/', [App\Http\Controllers\MateriController::class, 'store']);
29     Route::delete('/{materi}', [App\Http\Controllers\MateriController::class, 'destroy']);
30     Route::get('/{id}/edit', [App\Http\Controllers\MateriController::class, 'edit']);
31     Route::post('/{id}/update', [App\Http\Controllers\MateriController::class, 'update'])->name('update');
32 });
33

```

```

File Edit Selection View Go Run Terminal Help Controller.php - Elearning_pariwisata - Visual Studio Code
EXPLORER Controller.php X
ELEARNING_PARIWISATA app > Http > Controllers > Controller.php > ...
  app
  > Console
  > Exceptions
  > Http
  > Controllers
  Controller.php
  HomeController.php
  MateriController.php
  UserController.php
  Middleware
  Authenticate.php
  EncryptCookies.php
  PreventRequestsDuring...
  RedirectIfAuthenticated...
  TrimStrings.php
  TrustHosts.php
  TrustProxies.php
  VerifyCsrfToken.php
  Kernel.php
  > Models
  > Providers
  > bootstrap
  > config
  > database
  > factories
  > OUTLINE
  > NPM SCRIPTS
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Foundation\Auth\Access\AuthorizesRequests;
6 use Illuminate\Foundation\Bus\DispatchesJobs;
7 use Illuminate\Foundation\Validation\ValidatesRequests;
8 use Illuminate\Routing\Controller as BaseController;
9
10 class Controller extends BaseController
11 {
12     use AuthorizesRequests, DispatchesJobs, ValidatesRequests;
13 }
14

```

```
File Edit Selection View Go Run Terminal Help HomeController.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_...
app > Http > Controllers > HomeController.php > HomeController
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6 use Illuminate\Support\Facades\Auth;
7
8 class HomeController extends Controller
9
10 {
11     /**
12      * Create a new controller instance.
13      *
14      * @return void
15      */
16     public function __construct()
17     {
18         $this->middleware('auth');
19     }
20
21     /**
22      * Show the application dashboard.
23      *
24      * @return \Illuminate\Contracts\Support\Renderable
25      */
26     public function index()
27     {
28         return view('home', array('user' => Auth::user()));
29     }
30
31
32
```

```
File Edit Selection View Go Run Terminal Help MateriController.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
app > Http > Controllers > MateriController.php > MateriController > store
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6 use App\Models\Materi;
7 use Illuminate\Support\Facades\Auth;
8 use Materi as GlobalMateri;
9
10 class MateriController extends Controller
11 {
12     public function index(Request $request)
13     {
14         $materi = Materi::all();
15         return view('materi.index', ['materi' => $materi], ['user' => Auth::user()]);
16     }
17
18     public function create()
19     {
20         return view('materi.create', ['user' => Auth::user()]);
21     }
22
23     public function store(Request $request)
24     {
25         //Materi::create($request->all());
26         $bk = $request->berkas;
27         $namafile = $bk->getClientOriginalName();
28
29         $dtupload = new Materi;
30         $dtupload->nama_berkas = $request->nama_berkas;
31         $dtupload->berkas = $namafile;
32
```

```
File Edit Selection View Go Run Terminal Help MateriController.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
app > Http > Controllers > MateriController.php > MateriController > store
33 $dtupload->keterangan = $request->keterangan;
34
35 $bk->move(public_path(). '/file' , $namafile);
36 $dtupload->save();
37 return redirect('/materi') ->with('status', 'Data Materi Berhasil Ditambahkan');
38
39
40
41
42 public function show(Materi $materi)
43 {
44     //
45 }
46
47 public function edit($id)
48 {
49     $materi = Materi::find($id);
50     return view('materi/edit', ['materi' => $materi], ['user' => Auth::user()]);
51 }
52
53 public function update(Request $request, $id)
54 {
55     $materi = materi::find($id);
56     $materi->update($request->all());
57     return redirect('/materi')->with('status_edit', 'Data Materi Berhasil Diedit');
58 }
59
60
61
62 public function destroy(Materi $materi)
63 {
64
```

```
File Edit Selection View Go Run Terminal Help
MateriController.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Controllers
    Auth
    Controller.php
    HomeController.php
    MateriController.php
    UserController.php
  Middleware
  Kernel.php
  Models
  Providers
  bootstrap
  config
  database
  factories
  migrations
  seeders
  .gitignore
  node_modules
  public
  resources
  css
  js
  OUTLINE
  NPM SCRIPTS

app > Http > Controllers > MateriController.php > MateriController > store
62
63
64
65
66
67
68
69
70
71

public function destroy(Materi $materi)
{
    Materi::destroy($materi -> id );
    return redirect('/materi') -> with ('status_del', 'Data Materi Berhasil Dihapus');
}
```

```
File Edit Selection View Go Run Terminal Help
UserController.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Controllers
    Auth
    Controller.php
    HomeController.php
    MateriController.php
    UserController.php
  Middleware
  Kernel.php
  Models
  Providers
  bootstrap
  config
  database
  factories
  migrations
  seeders
  .gitignore
  node_modules
  public
  resources
  css
  js
  OUTLINE
  NPM SCRIPTS

app > Http > Controllers > UserController.php > UserController > store
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33

<?php
namespace App\Http\Controllers;

use Illuminate\Http\Request;
use App\Models\User;
use DataTables;
use Illuminate\Support\Facades\Auth;
use Illuminate\Support\Facades\Validator;
use Validator;

class UserController extends Controller
{
    public function index(Request $request)
    {
        $user = User::all();
        return view ('user.index', ['users' => $user], ['user' => Auth::user()]);
    }

    public function create()
    {
        return view('user.create', ['user' => Auth::user()]);
    }

    public function store(Request $request)
    {
        User::create($request->all());
        return redirect('/user') ->with ('status', 'Data Member Berhasil Ditambahkan');
    }
}
```

```
File Edit Selection View Go Run Terminal Help
UserController.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Controllers
    Auth
    Controller.php
    HomeController.php
    MateriController.php
    UserController.php
  Middleware
  Kernel.php
  Models
  Providers
  bootstrap
  config
  database
  factories
  migrations
  seeders
  .gitignore
  node_modules
  public
  resources
  css
  js
  OUTLINE
  NPM SCRIPTS

app > Http > Controllers > UserController.php > UserController > store
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63

}

public function show(User $user)
{
    //
}

public function edit($id)
{
    $users = User::find($id);
    return view('user/edit', ['users' => $users], ['user' => Auth::user()]);
}

public function update(Request $request, $id)
{
    $users = User::find($id);
    $users->update($request->all());
    return redirect('/user')->with('status_edit', 'Data Member Berhasil Diedit');
}

public function destroy(User $users)
{
    User::destroy($users -> id );
    return redirect('/user') -> with ('status_del', 'Data Member Berhasil Dihapus');
}
```

```
File Edit Selection View Go Run Terminal Help Authenticate.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Controllers
  Auth
  Controller.php
  HomeController.php
  MateriController.php
  UserController.php
  Middleware
  Authenticate.php
  EncryptCookies.php
  PreventRequestsDuring...
  RedirectIfAuthenticated...
  TrimStrings.php
  TrustHosts.php
  TrustProxies.php
  VerifyCsrfToken.php
  Kernel.php
  Models
  Providers
  bootstrap
  config
  database
  factories
  OUTLINE
  NPM SCRIPTS

Authenticate.php X
app > Http > Middleware > Authenticate.php > ...
1 <?php
2
3 namespace App\Http\Middleware;
4
5 use Illuminate\Auth\Middleware\Authenticate as Middleware;
6
7 class Authenticate extends Middleware
8 {
9     /**
10      * Get the path the user should be redirected to when they are not authenticated.
11      *
12      * @param \Illuminate\Http\Request $request
13      * @return string|null
14      */
15     protected function redirectTo($request)
16     {
17         if (! $request->expectsJson()) {
18             return route('login');
19         }
20     }
21 }
22
```

```
File Edit Selection View Go Run Terminal Help EncryptCookies.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Controllers
  Auth
  Controller.php
  HomeController.php
  MateriController.php
  UserController.php
  Middleware
  Authenticate.php
  EncryptCookies.php
  PreventRequestsDuring...
  RedirectIfAuthenticated...
  TrimStrings.php
  TrustHosts.php
  TrustProxies.php
  VerifyCsrfToken.php
  Kernel.php
  Models
  Providers
  bootstrap
  config
  database
  factories
  OUTLINE
  NPM SCRIPTS

EncryptCookies.php X
app > Http > Middleware > EncryptCookies.php > ...
1 <?php
2
3 namespace App\Http\Middleware;
4
5 use Illuminate\Cookie\Middleware\EncryptCookies as Middleware;
6
7 class EncryptCookies extends Middleware
8 {
9     /**
10      * The names of the cookies that should not be encrypted.
11      *
12      * @var array
13      */
14     protected $except = [
15         //
16     ];
17 }
18
```

```
File Edit Selection View Go Run Terminal Help PreventRequestsDuringMaintenance.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Controllers
  Auth
  Controller.php
  HomeController.php
  MateriController.php
  UserController.php
  Middleware
  Authenticate.php
  EncryptCookies.php
  PreventRequestsDuring...
  RedirectIfAuthenticated...
  TrimStrings.php
  TrustHosts.php
  TrustProxies.php
  VerifyCsrfToken.php
  Kernel.php
  Models
  Providers
  bootstrap
  config
  database
  factories
  OUTLINE
  NPM SCRIPTS

PreventRequestsDuringMaintenance.php X
app > Http > Middleware > PreventRequestsDuringMaintenance.php > ...
1 <?php
2
3 namespace App\Http\Middleware;
4
5 use Illuminate\Foundation\Http\Middleware\PreventRequestsDuringMaintenance as Middleware;
6
7 class PreventRequestsDuringMaintenance extends Middleware
8 {
9     /**
10      * The URIs that should be reachable while maintenance mode is enabled.
11      *
12      * @var array
13      */
14     protected $except = [
15         //
16     ];
17 }
18
```

```
File Edit Selection View Go Run Terminal Help RedirectIfAuthenticated.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Controllers
  Auth
  Controller.php
  HomeController.php
  MaterController.php
  UserController.php
  Middleware
  Authenticate.php
  EncryptCookies.php
  PreventRequestsDuring...
  RedirectIfAuthenticated...
  TrimStrings.php
  TrustHosts.php
  TrustProxies.php
  VerifyCsrfToken.php
  Kernel.php
  Models
  Providers
  bootstrap
  config
  database
  factories
  OUTLINE
  NPM SCRIPTS

app > Http > Middleware > RedirectIfAuthenticated.php > ...
1 <?php
2
3 namespace App\Http\Middleware;
4
5 use App\Providers\RouteServiceProvider;
6 use Closure;
7 use Illuminate\Http\Request;
8 use Illuminate\Support\Facades\Auth;
9
10 class RedirectIfAuthenticated
11 {
12     /**
13      * Handle an incoming request.
14      *
15      * @param \Illuminate\Http\Request $request
16      * @param \Closure $next
17      * @param string|null ...$guards
18      * @return mixed
19      */
20     public function handle(Request $request, Closure $next, ...$guards)
21     {
22         $guards = empty($guards) ? [null] : $guards;
23
24         foreach ($guards as $guard) {
25             if (Auth::guard($guard)->check()) {
26                 return redirect(RouteServiceProvider::HOME);
27             }
28         }
29
30         return $next($request);
31     }
32 }
33
```

```
File Edit Selection View Go Run Terminal Help TrimStrings.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Controllers
  Auth
  Controller.php
  HomeController.php
  MaterController.php
  UserController.php
  Middleware
  Authenticate.php
  EncryptCookies.php
  PreventRequestsDuring...
  RedirectIfAuthenticated...
  TrimStrings.php
  TrustHosts.php
  TrustProxies.php
  VerifyCsrfToken.php
  Kernel.php
  Models
  Providers
  bootstrap
  config
  database
  factories
  OUTLINE
  NPM SCRIPTS

app > Http > Middleware > TrimStrings.php > ...
1 <?php
2
3 namespace App\Http\Middleware;
4
5 use Illuminate\Foundation\Http\Middleware\TrimStrings as Middleware;
6
7 class TrimStrings extends Middleware
8 {
9     /**
10      * The names of the attributes that should not be trimmed.
11      *
12      * @var array
13      */
14     protected $except = [
15         'password',
16         'password_confirmation',
17     ];
18 }
19
```

Ln 1, Col 1 Spaces: 4 UTF-8 LF PHP

```
TrustHosts.php X
app > Http > Middleware > TrustHosts.php > ...
1 <?php
2
3 namespace App\Http\Middleware;
4
5 use Illuminate\Http\Middleware\TrustHosts as Middleware;
6
7 class TrustHosts extends Middleware
8 {
9     /**
10      * Get the host patterns that should be trusted.
11      *
12      * @return array
13      */
14     public function hosts()
15     {
16         return [
17             $this->allSubdomainsOfApplicationUrl(),
18         ];
19     }
20 }
21
```

Ln 1, Col 1 Spaces: 4 UTF-8 LF PHP

```
TrustProxies.php X
app > Http > Middleware > TrustProxies.php > ...
1 <?php
2
3 namespace App\Http\Middleware;
4
5 use Fideloper\Proxy\TrustProxies as Middleware;
6 use Illuminate\Http\Request;
7
8 class TrustProxies extends Middleware
9 {
10     /**
11      * The trusted proxies for this application.
12      *
13      * @var array|string|null
14      */
15     protected $proxies;
16
17     /**
18      * The headers that should be used to detect proxies.
19      *
20      * @var int
21      */
22     protected $headers = Request::HEADER_X_FORWARDED_ALL;
23 }
24
```

Ln 1, Col 1 Spaces: 4 UTF-8 LF PHP

VerifyCsrfToken.php - Elearning_pariwisata - Visual Studio Code

```
1 <?php
2
3 namespace App\Http\Middleware;
4
5 use Illuminate\Foundation\Http\Middleware\VerifyCsrfToken as Middleware;
6
7 class VerifyCsrfToken extends Middleware
8 {
9     /**
10      * The URIs that should be excluded from CSRF verification.
11      *
12      * @var array
13      */
14     protected $except = [
15         //
16     ];
17
18 }
```

Ln 1, Col 1 Spaces:4 UTF-8 LF PHP

Kernel.php - Elearning_pariwisata - Visual Studio Code

```
1 <?php
2
3 namespace App\Http;
4
5 use Illuminate\Foundation\Http\Kernel as HttpKernel;
6
7 class Kernel extends HttpKernel
8 {
9     /**
10      * The application's global HTTP middleware stack.
11      * These middleware are run during every request to your application.
12      *
13      * @var array
14      */
15     protected $middleware = [
16         // \App\Http\Middleware\TrustHosts::class,
17         \App\Http\Middleware\TrustProxies::class,
18         \Fruitcake\Cors\HandleCors::class,
19         \App\Http\Middleware\PreventRequestsDuringMaintenance::class,
20         \Illuminate\Foundation\Http\Middleware\ValidatePostSize::class,
21         \App\Http\Middleware\TrimStrings::class,
22         \Illuminate\Foundation\Http\Middleware\ConvertEmptyStringsToNull::class,
23     ];
24
25     /**
26      * The application's route middleware groups.
27      *
28      * @var array
29      */
30     protected $middlewareGroups = [
31         'web' => [
32             \App\Http\Middleware\EncryptCookies::class,
33             // \App\Http\Middleware\AddLinkHeaderForRequests::class,
34             \Illuminate\Routing\Middleware\SubstituteBindings::class,
35         ],
36     ];
37
38     /**
39      * The application's middleware aliases.
40      * Aliases may be used instead of class names to conveniently assign middleware to routes and controllers.
41      *
42      * @var array
43      */
44     protected $middlewareAliases = [
45         'auth' => \Illuminate\Auth\Middleware\Authenticate::class,
46         'auth.basic' => \Illuminate\Auth\Middleware\AuthenticateWithBasicAuth::class,
47         'bindings' => \Illuminate\Routing\Middleware\SubstituteBindings::class,
48         'cache.headers' => \Illuminate\Http\Middleware\SetCacheHeaders::class,
49         'can' => \Illuminate\Auth\Middleware\Authorize::class,
50         'guest' => \Illuminate\Routing\Middleware\RedirectIfAuthenticated::class,
51         'password.confirm' => \Illuminate\Foundation\Http\Middleware\RequireCurrentPasswordConfirmation::class,
52         'signed' => \Illuminate\Routing\Middleware\ValidateSignature::class,
53         'throttle' => \Illuminate\Routing\Middleware\ThrottleRequests::class,
54         'verified' => \Illuminate\Auth\Middleware\RequireVerified::class,
55     ];
56 }
```

Ln 67, Col 9 Spaces:4 UTF-8 LF PHP

```
File Edit Selection View Go Run Terminal Help Kernel.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Controllers
  Auth
  Controller.php
  HomeController.php
  MateriController.php
  UserController.php
  Middleware
  Authenticate.php
  EncryptCookies.php
  PreventRequestsDuring...
  RedirectIfAuthenticated...
  TrimStrings.php
  TrustHosts.php
  TrustProxies.php
  VerifyCsrfToken.php
  Kernel.php
  Models
  Providers
  bootstrap
  config
  database
  factories
  OUTLINE
  NPM SCRIPTS

app > Http > Kernel.php > Kernel > $routeMiddleware
33
34 \App\Http\Middleware\EncryptCookies::class,
35 \Illuminate\Cookie\Middleware\AddQueuedCookiesToResponse::class,
36 \Illuminate\Session\Middleware\StartSession::class,
37 // \Illuminate\Session\Middleware\AuthenticateSession::class,
38 \Illuminate\View\Middleware\ShareErrorsFromSession::class,
39 \App\Http\Middleware\VerifyCsrfToken::class,
40 \Illuminate\Routing\Middleware\SubstituteBindings::class,
41 ],
42
43 'api' => [
44     'throttle:api',
45     \Illuminate\Routing\Middleware\SubstituteBindings::class,
46 ],
47 ];
48
49 /**
50  * The application's route middleware.
51  *
52  * These middleware may be assigned to groups or used individually.
53  *
54  * @var array
55  */
56 protected $routeMiddleware = [
57     'auth' => \App\Http\Middleware\Authenticate::class,
58     'auth.basic' => \Illuminate\Auth\Middleware\AuthenticateWithBasicAuth::class,
59     'cache.headers' => \Illuminate\Http\Middleware\SetCacheHeaders::class,
60     'can' => \Illuminate\Auth\Middleware\Authorize::class,
61     'guest' => \App\Http\Middleware\RedirectIfAuthenticated::class,
62     'password.confirm' => \Illuminate\Auth\Middleware\RequirePassword::class,
63     'signed' => \Illuminate\Routing\Middleware\ValidateSignature::class,
64     'throttle' => \Illuminate\Routing\Middleware\ThrottleRequests::class,
65     'verified' => \Illuminate\Auth\Middleware\EnsureEmailIsVerified::class,
66 ];
```

```
File Edit Selection View Go Run Terminal Help Kernel.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Controllers
  Auth
  Controller.php
  HomeController.php
  MateriController.php
  UserController.php
  Middleware
  Authenticate.php
  EncryptCookies.php
  PreventRequestsDuring...
  RedirectIfAuthenticated...
  TrimStrings.php
  TrustHosts.php
  TrustProxies.php
  VerifyCsrfToken.php
  Kernel.php
  Models
  Providers
  bootstrap
  config
  database
  factories
  OUTLINE
  NPM SCRIPTS

app > Http > Kernel.php > Kernel > $routeMiddleware
47
48 /**
49  * The application's route middleware.
50  *
51  * These middleware may be assigned to groups or used individually.
52  *
53  * @var array
54  */
55 protected $routeMiddleware = [
56     'auth' => \App\Http\Middleware\Authenticate::class,
57     'auth.basic' => \Illuminate\Auth\Middleware\AuthenticateWithBasicAuth::class,
58     'cache.headers' => \Illuminate\Http\Middleware\SetCacheHeaders::class,
59     'can' => \Illuminate\Auth\Middleware\Authorize::class,
60     'guest' => \App\Http\Middleware\RedirectIfAuthenticated::class,
61     'password.confirm' => \Illuminate\Auth\Middleware\RequirePassword::class,
62     'signed' => \Illuminate\Routing\Middleware\ValidateSignature::class,
63     'throttle' => \Illuminate\Routing\Middleware\ThrottleRequests::class,
64     'verified' => \Illuminate\Auth\Middleware\EnsureEmailIsVerified::class,
65     'role' => \Spatie\Permission\Middlewares\RoleMiddleware::class,
66     'permission' => \Spatie\Permission\Middlewares\PermissionMiddleware::class,
67     'role_or_permission' => \Spatie\Permission\Middlewares\RoleOrPermissionMiddleware::class,
68 ];
69
70 }
```



```
File Edit Selection View Go Run Terminal Help Materi.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Kernel.php
  Exceptions
  Http
  Controllers
  Middleware
  Kernel.php
  Models
  Materi.php
  User.php
  Providers
  bootstrap
  config
  database
  factories
  migrations
  seeders
  .gitignore
  node_modules
  public
  resources
  css
  js
  lang
  sass
  OUTLINE
  NPM SCRIPTS

app > Models > Materi.php > Materi > $fillable
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Factories\HasFactory;
6 use Illuminate\Database\Eloquent\Model;
7
8 class Materi extends Model
9 {
10     use HasFactory;
11     protected $fillable = [
12         'nama_berkas',
13         'berkas',
14         'keterangan',
15     ];
16     protected $table = 'materi';
17 }
18
```

Ln 14, Col 22 Spaces: 4 UTF-8 LF PHP

```
File Edit Selection View Go Run Terminal Help User.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Kernel.php
  Exceptions
  Http
  Controllers
  Middleware
  Kernel.php
  Models
  Materi.php
  User.php
  Providers
  bootstrap
  config
  database
  factories
  migrations
  seeders
  .gitignore
  node_modules
  public
  resources
  css
  js
  lang
  sass
  OUTLINE
  NPM SCRIPTS

app > Models > User.php > User
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Contracts\Auth\MustVerifyEmail;
6 use Illuminate\Database\Eloquent\Factories\HasFactory;
7 use Illuminate\Foundation\Auth\User as Authenticatable;
8 use Illuminate\Notifications\Notifiable;
9 use Spatie\Permission\Traits\HasRoles;
10
11 class User extends Authenticatable
12 {
13     use HasFactory, Notifiable, HasRoles;
14
15     /**
16      * The attributes that are mass assignable.
17      *
18      * @var array
19      */
20     protected $fillable = [
21         'name',
22         'email',
23         'password',
24         'no_ponsel',
25         'avatar',
26     ];
27
28     /**
29      * The attributes that should be hidden for arrays.
30      *
31      * @var array
32      */
33     protected $hidden = [

```

Ln 41, Col 18 Spaces: 4 UTF-8 LF PHP

```
File Edit Selection View Go Run Terminal Help User.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
ELEARNING_PARIWISATA
app
  Console
  Kernel.php
  Exceptions
  Http
  Controllers
  Middleware
  Kernel.php
  Models
  Materi.php
  User.php
  Providers
  bootstrap
  config
  database
  factories
  migrations
  seeders
  .gitignore
  node_modules
  public
  resources
  css
  js
  lang
  sass
  OUTLINE
  NPM SCRIPTS
app > Models > User.php > User
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
User
/**
 * @var array
 */
protected $fillable = [
    'name',
    'email',
    'password',
    'no_ponsel',
    'avatar',
];

/**
 * The attributes that should be hidden for arrays.
 *
 * @var array
 */
protected $hidden = [
    'password',
    'remember_token',
];

/**
 * The attributes that should be cast to native types.
 *
 * @var array
 */
protected $casts = [
    'email_verified_at' => 'datetime',
];

protected $table = 'users';
```

```
File Edit Selection View Go Run Terminal Help AppServiceProvider.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
ELEARNING_PARIWISATA
  Http
  Controllers
  Middleware
  Kernel.php
  Models
  Materi.php
  User.php
  Providers
  AppServiceProvider.php
  AuthServiceProvider.php
  BroadcastServiceProvider...
  EventServiceProvider.php
  RouteServiceProvider.php
  bootstrap
  config
  app.php
  auth.php
  broadcasting.php
  cache.php
  cors.php
  database.php
  filesystems.php
  hashing.php
  logging.php
  mail.php
  permission.php
  OUTLINE
  NPM SCRIPTS
app > Providers > AppServiceProvider.php > AppServiceProvider > boot
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
AppServiceProvider.php
<?php
namespace App\Providers;
use Illuminate\Support\ServiceProvider;
use Illuminate\Support\Facades\Schema;
class AppServiceProvider extends ServiceProvider
{
    /**
     * Register any application services.
     *
     * @return void
     */
    public function register()
    {
        //
    }

    /**
     * Bootstrap any application services.
     *
     * @return void
     */
    public function boot()
    {
        Schema::defaultStringLength(191);
    }
}
```

```
AuthServiceProvider.php - Elearning_pariwisata - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER
ELEARNING_PARIWISATA
  Http
  Controllers
  Middleware
  Kernel.php
  Models
  Materi.php
  User.php
  Providers
  AppServiceProvider.php
  AuthServiceProvider.php
  BroadcastServiceProvider...
  EventServiceProvider.php
  RouteServiceProvider.php
bootstrap
config
  app.php
  auth.php
  broadcasting.php
  cache.php
  cors.php
  database.php
  filesystems.php
  hashing.php
  logging.php
  mail.php
  permission.php
  OUTLINE
  NPM SCRIPTS
AuthServiceProvider.php X
app > Providers > AuthServiceProvider.php > ...
1 <?php
2
3 namespace App\Providers;
4
5 use Illuminate\Foundation\Support\Providers\AuthServiceProvider as ServiceProvider;
6 use Illuminate\Support\Facades\Gate;
7
8 class AuthServiceProvider extends ServiceProvider
9 {
10
11     /**
12      * The policy mappings for the application.
13      *
14      * @var array
15      */
16     protected $policies = [
17         // 'App\Models\Model' => 'App\Policies\ModelPolicy',
18     ];
19
20     /**
21      * Register any authentication / authorization services.
22      *
23      * @return void
24      */
25     public function boot()
26     {
27         $this->registerPolicies();
28
29         //
30     }
31 }
```

```
BroadcastServiceProvider.php - Elearning_pariwisata - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER
ELEARNING_PARIWISATA
  Http
  Controllers
  Middleware
  Kernel.php
  Models
  Materi.php
  User.php
  Providers
  AppServiceProvider.php
  AuthServiceProvider.php
  BroadcastServiceProvider...
  EventServiceProvider.php
  RouteServiceProvider.php
bootstrap
config
  app.php
  auth.php
  broadcasting.php
  cache.php
  cors.php
  database.php
  filesystems.php
  hashing.php
  logging.php
  mail.php
  permission.php
  OUTLINE
  NPM SCRIPTS
BroadcastServiceProvider.php X
app > Providers > BroadcastServiceProvider.php > ...
1 <?php
2
3 namespace App\Providers;
4
5 use Illuminate\Support\Facades\Broadcast;
6 use Illuminate\Support\ServiceProvider;
7
8 class BroadcastServiceProvider extends ServiceProvider
9 {
10
11     /**
12      * Bootstrap any application services.
13      *
14      * @return void
15      */
16     public function boot()
17     {
18         Broadcast::routes();
19
20         require base_path('routes/channels.php');
21     }
22 }
```

```
File Edit Selection View Go Run Terminal Help EventServiceProvider.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  Http
  Controllers
  Middleware
  Kernel.php
  Models
  Materi.php
  User.php
  Providers
  AppServiceProvider.php
  AuthServiceProvider.php
  BroadcastServiceProvider.php
  EventServiceProvider.php
  RouteServiceProvider.php
bootstrap
config
  app.php
  auth.php
  broadcasting.php
  cache.php
  cors.php
  database.php
  filesystems.php
  hashing.php
  logging.php
  mail.php
  permission.php
  OUTLINE
  NPM SCRIPTS

EventServiceProvider.php X
app > Providers > EventServiceProvider.php > ...
1  ?php
2
3  namespace App\Providers;
4
5  use Illuminate\Auth\Events\Registered;
6  use Illuminate\Auth\Listeners\SendEmailVerificationNotification;
7  use Illuminate\Foundation\Support\Providers\EventServiceProvider as ServiceProvider;
8  use Illuminate\Support\Facades\Event;
9
10 class EventServiceProvider extends ServiceProvider
11 {
12     /**
13      * The event listener mappings for the application.
14      *
15      * @var array
16      */
17     protected $listen = [
18         Registered::class => [
19             SendEmailVerificationNotification::class,
20         ],
21     ];
22
23     /**
24      * Register any events for your application.
25      *
26      * @return void
27      */
28     public function boot()
29     {
30         //
31     }
32 }
33
```

```
File Edit Selection View Go Run Terminal Help RouteServiceProvider.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  Http
  Controllers
  Middleware
  Kernel.php
  Models
  Materi.php
  User.php
  Providers
  AppServiceProvider.php
  AuthServiceProvider.php
  BroadcastServiceProvider.php
  EventServiceProvider.php
  RouteServiceProvider.php
bootstrap
config
  app.php
  auth.php
  broadcasting.php
  cache.php
  cors.php
  database.php
  filesystems.php
  hashing.php
  logging.php
  mail.php
  permission.php
  OUTLINE
  NPM SCRIPTS

RouteServiceProvider.php X
app > Providers > RouteServiceProvider.php > ...
1  ?php
2
3  namespace App\Providers;
4
5  use Illuminate\Cache\RateLimiting\Limit;
6  use Illuminate\Foundation\Support\Providers\RouteServiceProvider as ServiceProvider;
7  use Illuminate\Http\Request;
8  use Illuminate\Support\Facades\RateLimiter;
9  use Illuminate\Support\Facades\Route;
10
11 class RouteServiceProvider extends ServiceProvider
12 {
13     /**
14      * The path to the "home" route for your application.
15      *
16      * This is used by Laravel authentication to redirect users after login.
17      *
18      * @var string
19      */
20     public const HOME = '/home';
21
22     /**
23      * The controller namespace for the application.
24      *
25      * When present, controller route declarations will automatically be prefixed with this namespace.
26      *
27      * @var string|null
28      */
29     // protected $namespace = 'App\Http\Controllers';
30
31     /**
32      * Define your route model bindings, pattern filters, etc.
33      */
34 }
```

```
File Edit Selection View Go Run Terminal Help RouteServiceProvider.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  Http
  Controllers
  Middleware
  Kernel.php
  Models
  Materi.php
  User.php
  Providers
  AppServiceProvider.php
  AuthServiceProvider.php
  BroadcastServiceProvider.php
  EventServiceProvider.php
  RouteServiceProvider.php
  bootstrap
  config
  app.php
  auth.php
  broadcasting.php
  cache.php
  cors.php
  database.php
  filesystems.php
  hashing.php
  logging.php
  mail.php
  permission.php
  OUTLINE
  NPM SCRIPTS

RouteServiceProvider.php X
app > Providers > RouteServiceProvider.php > ...
32 * Define your route model bindings, pattern filters, etc.
33 *
34 * @return void
35 */
36 public function boot()
37 {
38     $this->configureRateLimiting();
39
40     $this->routes(function () {
41         Route::prefix('api')
42             ->middleware('api')
43             ->namespace($this->namespace)
44             ->group(base_path('routes/api.php'));
45
46         Route::middleware('web')
47             ->namespace($this->namespace)
48             ->group(base_path('routes/web.php'));
49     });
50
51     /**
52     * Configure the rate limiters for the application.
53     *
54     * @return void
55     */
56     protected function configureRateLimiting()
57     {
58         RateLimiter::for('api', function (Request $request) {
59             return Limit::perMinute(60)->by(optional($request->user())->id ?: $request->ip());
60         });
61     }
62
63 }
```

```
File Edit Selection View Go Run Terminal Help 2014_10_12_000000_create_users_table.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Models
  Providers
  bootstrap
  config
  database
  factories
  migrations
  2014_10_12_000000_creat...
  2014_10_12_100000_creat...
  2019_08_19_000000_creat...
  2020_11_18_164044_creat...
  2020_11_26_190040_mate...
  seeders
  .gitignore
  node_modules
  public
  resources
  css
  js
  lang
  sass
  views
  OUTLINE
  NPM SCRIPTS

2014_10_12_000000_create_users_table.php X
database > migrations > 2014_10_12_000000_create_users_table.php > CreateUsersTable
1 <?php
2
3 use Illuminate\Database\Migrations\Migration;
4 use Illuminate\Database\Schema\Blueprint;
5 use Illuminate\Support\Facades\Schema;
6
7 class CreateUsersTable extends Migration
8 {
9
10     public function up()
11     {
12         Schema::create('users', function (Blueprint $table) {
13             $table->id();
14             $table->string('name');
15             $table->string('email')->unique();
16             $table->string('no_ponsel');
17             $table->timestamp('email_verified_at')->nullable();
18             $table->string('avatar')->default('default.jpg');
19             $table->string('password');
20             $table->rememberToken();
21             $table->timestamps();
22         });
23     }
24
25     public function down()
26     {
27         Schema::dropIfExists('users');
28     }
29
30 }
31 }
```

The screenshot shows the Visual Studio Code editor with a file explorer on the left and a code editor in the center. The file explorer shows a project structure for 'ELEARNING_PARIWISATA' with folders for 'app', 'database', 'migrations', 'seeder', and 'resources'. The code editor displays a PHP migration file named '2014_10_12_100000_create_password_resets_table.php'. The code defines a class 'CreatePasswordResetsTable' that extends 'Migration'. It includes an 'up()' method that creates a 'password_resets' table with columns for 'email' (index), 'token', and 'created_at' (timestamp, nullable). It also includes a 'down()' method that drops the 'password_resets' table if it exists. The status bar at the bottom indicates 'Ln 9, Col 5, Spaces: 4, UTF-8, LF, PHP'.

```
1 <?php
2
3 use Illuminate\Database\Migrations\Migration;
4 use Illuminate\Database\Schema\Blueprint;
5 use Illuminate\Support\Facades\Schema;
6
7 class CreatePasswordResetsTable extends Migration
8 {
9
10 public function up()
11 {
12     Schema::create('password_resets', function (Blueprint $table) {
13         $table->string('email')->index();
14         $table->string('token');
15         $table->timestamp('created_at')->nullable();
16     });
17 }
18
19 public function down()
20 {
21     Schema::dropIfExists('password_resets');
22 }
23 }
24
25
```

The screenshot shows the Visual Studio Code editor with a file explorer on the left and a code editor in the center. The file explorer shows a project structure for 'ELEARNING_PARIWISATA' with folders for 'app', 'database', 'migrations', 'seeder', and 'resources'. The code editor displays a PHP migration file named '2019_08_19_000000_create_failed_jobs_table.php'. The code defines a class 'CreateFailedJobsTable' that extends 'Migration'. It includes an 'up()' method that creates a 'failed_jobs' table with columns for 'id' (primary key), 'uuid' (unique), 'connection', 'queue', 'payload', 'exception', and 'failed_at' (timestamp, uses current time). It also includes a 'down()' method that drops the 'failed_jobs' table if it exists. The status bar at the bottom indicates 'Ln 27, Col 1, Spaces: 4, UTF-8, LF, PHP'.

```
1 <?php
2
3 use Illuminate\Database\Migrations\Migration;
4 use Illuminate\Database\Schema\Blueprint;
5 use Illuminate\Support\Facades\Schema;
6
7 class CreateFailedJobsTable extends Migration
8 {
9     /**
10      * Run the migrations.
11      *
12      * @return void
13      */
14     public function up()
15     {
16         Schema::create('failed_jobs', function (Blueprint $table) {
17             $table->id();
18             $table->string('uuid')->unique();
19             $table->text('connection');
20             $table->text('queue');
21             $table->longText('payload');
22             $table->longText('exception');
23             $table->timestamp('failed_at')->useCurrent();
24         });
25     }
26
27     public function down()
28     {
29         Schema::dropIfExists('failed_jobs');
30     }
31 }
32
33
```

```
File Edit Selection View Go Run Terminal Help 2020_11_18_164044_create_permission_tables.php - Elearning_pariwisata - Visual Studio Code

EXPLORER ... _10_12_100000_create_password_resets_table.php 2019_08_19_000000_create_failed_jobs_table.php 2020_11_18_164044_create_permission_tables.php X ...

ELEARNING_PARIWISATA
  database > migrations > 2020_11_18_164044_create_permission_tables.php > ...
  1 <?php
  2
  3 use Illuminate\Support\Facades\Schema;
  4 use Illuminate\Database\Schema\Blueprint;
  5 use Illuminate\Database\Migrations\Migration;
  6
  7 class CreatePermissionTables extends Migration
  8 {
  9
  10     /**
  11      * Run the migrations.
  12      *
  13      * @return void
  14      */
  15     public function up()
  16     {
  17         $tableNames = config('permission.table_names');
  18         $columnNames = config('permission.column_names');
  19
  20         if (empty($tableNames)) {
  21             throw new \Exception('Error: config/permission.php not loaded. Run [php artisan config:clear] and try again.');
  22         }
  23
  24         Schema::create($tableNames['permissions'], function (Blueprint $table) {
  25             $table->bigIncrements('id');
  26             $table->string('name');
  27             $table->string('guard_name');
  28             $table->timestamps();
  29         });
  30
  31         Schema::create($tableNames['roles'], function (Blueprint $table) {
  32             $table->bigIncrements('id');
  33             $table->string('name');
  34             $table->string('guard_name');
```

```
File Edit Selection View Go Run Terminal Help 2020_11_18_164044_create_permission_tables.php - Elearning_pariwisata - Visual Studio Code

EXPLORER ... _10_12_100000_create_password_resets_table.php 2019_08_19_000000_create_failed_jobs_table.php 2020_11_18_164044_create_permission_tables.php X ...

ELEARNING_PARIWISATA
  database > migrations > 2020_11_18_164044_create_permission_tables.php > ...
  32 $table->string('name');
  33 $table->string('guard_name');
  34 $table->timestamps();
  35 });
  36
  37 Schema::create($tableNames['model_has_permissions'], function (Blueprint $table) use ($tableNames, $columnNames) {
  38     $table->unsignedBigInteger('permission_id');
  39
  40     $table->string('model_type');
  41     $table->unsignedBigInteger($columnNames['model_morph_key']);
  42     $table->index([$columnNames['model_morph_key'], 'model_type'], 'model_has_permissions_model_id_model_type_index');
  43
  44     $table->foreign('permission_id')
  45         ->references('id')
  46         ->on($tableNames['permissions'])
  47         ->onDelete('cascade');
  48
  49     $table->primary(['permission_id', $columnNames['model_morph_key'], 'model_type'],
  50         'model_has_permissions_permission_model_type_primary');
  51 });
  52
  53 Schema::create($tableNames['model_has_roles'], function (Blueprint $table) use ($tableNames, $columnNames) {
  54     $table->unsignedBigInteger('role_id');
  55
  56     $table->string('model_type');
  57     $table->unsignedBigInteger($columnNames['model_morph_key']);
  58     $table->index([$columnNames['model_morph_key'], 'model_type'], 'model_has_roles_model_id_model_type_index');
  59
  60     $table->foreign('role_id')
  61         ->references('id')
  62         ->on($tableNames['roles'])
  63         ->onDelete('cascade');
```

```

2020_11_18_164044_create_permission_tables.php - Elearning_pariwisata - Visual Studio Code
... _10_12_100000_create_password_resets_table.php 2019_08_19_000000_create_failed_jobs_table.php 2020_11_18_164044_create_permission_tables.php X
EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Models
  Providers
  bootstrap
  config
  database
  factories
  migrations
  2014_10_12_000000_creat...
  2014_10_12_100000_creat...
  2019_08_19_000000_creat...
  2020_11_18_164044_creat...
  2020_11_26_190040_mate...
  seeders
  .gitignore
  node_modules
  public
  resources
  css
  js
  lang
  sass
  views
  OUTLINE
  NPM SCRIPTS
database > migrations > 2020_11_18_164044_create_permission_tables.php > ...
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
    $table->foreign('role_id')
        ->references('id')
        ->on($tableNames['roles'])
        ->onDelete('cascade');

    $table->primary(['role_id', $columnNames['model_morph_key'], 'model_type'],
        'model_has_roles_role_model_type_primary');
});

Schema::create($tableNames['role_has_permissions'], function (Blueprint $table) use ($tableNames) {
    $table->unsignedBigInteger('permission_id');
    $table->unsignedBigInteger('role_id');

    $table->foreign('permission_id')
        ->references('id')
        ->on($tableNames['permissions'])
        ->onDelete('cascade');

    $table->foreign('role_id')
        ->references('id')
        ->on($tableNames['roles'])
        ->onDelete('cascade');

    $table->primary(['permission_id', 'role_id'], 'role_has_permissions_permission_id_role_id_primary');
});

app('cache')
    ->store(config('permission.cache.store') != 'default' ? config('permission.cache.store') : null)
    ->forget(config('permission.cache.key'));
}

}

```

```

2020_11_18_164044_create_permission_tables.php - Elearning_pariwisata - Visual Studio Code
... _10_12_100000_create_password_resets_table.php 2019_08_19_000000_create_failed_jobs_table.php 2020_11_18_164044_create_permission_tables.php X
EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Models
  Providers
  bootstrap
  config
  database
  factories
  migrations
  2014_10_12_000000_creat...
  2014_10_12_100000_creat...
  2019_08_19_000000_creat...
  2020_11_18_164044_creat...
  2020_11_26_190040_mate...
  seeders
  .gitignore
  node_modules
  public
  resources
  css
  js
  lang
  sass
  views
  OUTLINE
  NPM SCRIPTS
database > migrations > 2020_11_18_164044_create_permission_tables.php > ...
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
    /**
     * Reverse the migrations.
     *
     * @return void
     */
    public function down()
    {
        $tableNames = config('permission.table_names');

        if (empty($tableNames)) {
            throw new \Exception('Error: config/permission.php not found and defaults could not be merged. Please pub...');
        }

        Schema::drop($tableNames['role_has_permissions']);
        Schema::drop($tableNames['model_has_roles']);
        Schema::drop($tableNames['model_has_permissions']);
        Schema::drop($tableNames['roles']);
        Schema::drop($tableNames['permissions']);
    }
}

```



```
File Edit Selection View Go Run Terminal Help 2020_11_26_190040_materi.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  app
  Console
  Exceptions
  Http
  Models
  Providers
  bootstrap
  config
  database
  factories
  migrations
  2014_10_12_000000_creat...
  2014_10_12_100000_creat...
  2019_08_19_000000_creat...
  2020_11_18_164044_creat...
  2020_11_26_190040_mate...
  seeders
  .gitignore
  node_modules
  public
  resources
  css
  js
  lang
  sass
  views
  OUTLINE
  NPM SCRIPTS

database > migrations > 2020_11_26_190040_materi.php X Materi
1 <?php
2
3 use Illuminate\Database\Migrations\Migration;
4 use Illuminate\Database\Schema\Blueprint;
5 use Illuminate\Support\Facades\Schema;
6
7 class Materi extends Migration
8 {
9     /**
10      * Run the migrations.
11      *
12      * @return void
13      */
14     public function up()
15     {
16         Schema::create('materi', function (Blueprint $table) {
17             $table->id();
18             $table->string('nama_berkas');
19             $table->string('berkas');
20             $table->string('keterangan');
21             $table->rememberToken();
22             $table->timestamps();
23         });
24     }
25
26     public function down()
27     {
28         //
29     }
30
31 }
32
```

```
File Edit Selection View Go Run Terminal Help confirm.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  css
  js
  lang
  sass
  views
  auth
  passwords
  confirm.blade.php
  email.blade.php
  reset.blade.php
  login.blade.php
  login1.blade.php
  register.blade.php
  verify.blade.php
  layouts
  admin.blade.php
  app.blade.php
  login.blade.php
  master.blade.php
  materi
  create.blade.php
  edit.blade.php
  index.blade.php
  user
  create.blade.php
  edit.blade.php
  OUTLINE
  NPM SCRIPTS

resources > views > auth > passwords > confirm.blade.php > ...
1 @extends('layouts.app')
2
3 @section('content')
4 <div class="container">
5 <div class="row justify-content-center">
6 <div class="col-md-8">
7 <div class="card">
8 <div class="card-header">{{ __('Confirm Password') }}</div>
9
10 <div class="card-body">
11 {{ __('Please confirm your password before continuing.') }}
12
13 <form method="POST" action="{{ route('password.confirm') }}">
14 @csrf
15
16 <div class="form-group row">
17 <label for="password" class="col-md-4 col-form-label text-md-right">{{ __('Password') }}</label>
18
19 <div class="col-md-6">
20 <input id="password" type="password" class="form-control @error('password') is-invalid">
21
22 @error('password')
23 <span class="invalid-feedback" role="alert">
24 <strong>{{ $message }}</strong>
25 </span>
26 @enderror
27 </div>
28 </div>
29
30 <div class="form-group row mb-0">
31 <div class="col-md-8 offset-md-4">
32 <button type="submit" class="btn btn-primary">
33 // {{ __('Confirm Password') }}
34
```

```
confirm.blade.php - Elearning_pariwisata - Visual Studio Code
resources > views > auth > passwords > confirm.blade.php > ...
20 <input id="password" type="password" class="form-control @error('password') is-invalid
21
22 @error('password')
23 <span class="invalid-feedback" role="alert">
24 <strong>{{ $message }}</strong>
25 </span>
26 @enderror
27 </div>
28 </div>
29
30 <div class="form-group row mb-0">
31 <div class="col-md-8 offset-md-4">
32 <button type="submit" class="btn btn-primary">
33 <span>{{ __('Confirm Password') }}</span>
34 </button>
35
36 @if (Route::has('password.request'))
37 <a class="btn btn-link" href="{{ route('password.request') }}">
38 <span>{{ __('Forgot Your Password?') }}</span>
39 </a>
40 @endif
41 </div>
42 </div>
43 </form>
44 </div>
45 </div>
46 </div>
47
48 </div>
49 @endsection
50
```

```
email.blade.php - Elearning_pariwisata - Visual Studio Code
resources > views > auth > passwords > email.blade.php > ...
1 @extends('layouts.app')
2
3 @section('content')
4 <div class="container">
5 <div class="row justify-content-center">
6 <div class="col-md-8">
7 <div class="card">
8 <div class="card-header">{{ __('Reset Password') }}</div>
9
10 <div class="card-body">
11 @if (session('status'))
12 <div class="alert alert-success" role="alert">
13 <span>{{ session('status') }}</span>
14 </div>
15 @endif
16
17 <form method="POST" action="{{ route('password.email') }}">
18 @csrf
19
20 <div class="form-group row">
21 <label for="email" class="col-md-4 col-form-label text-md-right">{{ __('E-Mail Address') }}
22
23 <div class="col-md-6">
24 <input id="email" type="email" class="form-control @error('email') is-invalid @enderror
25
26 @error('email')
27 <span class="invalid-feedback" role="alert">
28 <strong>{{ $message }}</strong>
29 </span>
30 @enderror
31 </div>
32 </div>
33
```

```
File Edit Selection View Go Run Terminal Help email.blade.php - Elearning_parwisata - Visual Studio Code

EXPLORER
resources > views > auth > passwords > email.blade.php > ...
css
js
lang
sass
views
  auth
    passwords
      confirm.blade.php
      email.blade.php
      reset.blade.php
      login.blade.php
      login1.blade.php
      register.blade.php
      verify.blade.php
  layouts
    admin.blade.php
    app.blade.php
    login.blade.php
    master.blade.php
  materi
    create.blade.php
    edit.blade.php
    index.blade.php
  user
    create.blade.php
    edit.blade.php
  OUTLINE
  NPM SCRIPTS

email.blade.php
16 <form method="POST" action="{{ route('password.email') }}">
17 @csrf
18
19 <div class="form-group row">
20 <label for="email" class="col-md-4 col-form-label text-md-right">{{ __('E-Mail Address') }}
21
22 <div class="col-md-6">
23 <input id="email" type="email" class="form-control @error('email') is-invalid @enderror"
24
25 <div class="invalid-feedback">
26 @error('email')
27 <span class="invalid-feedback" role="alert">
28 <strong>{{ $message }}</strong>
29 </span>
30 @enderror
31 </div>
32 </div>
33
34 <div class="form-group row mb-0">
35 <div class="col-md-6 offset-md-4">
36 <button type="submit" class="btn btn-primary">
37 {{ __('Send Password Reset Link') }}
38 </button>
39 </div>
40 </div>
41 </form>
42 </div>
43 </div>
44 </div>
45 </div>
46 @endsection
47
48
```

```
File Edit Selection View Go Run Terminal Help reset.blade.php - Elearning_parwisata - Visual Studio Code

EXPLORER
resources > views > auth > passwords > reset.blade.php > ...
css
js
lang
sass
views
  auth
    passwords
      confirm.blade.php
      email.blade.php
      reset.blade.php
      login.blade.php
      login1.blade.php
      register.blade.php
      verify.blade.php
  layouts
    admin.blade.php
    app.blade.php
    login.blade.php
    master.blade.php
  materi
    create.blade.php
    edit.blade.php
    index.blade.php
  user
    create.blade.php
    edit.blade.php
  OUTLINE
  NPM SCRIPTS

reset.blade.php
1 @extends('layouts.app')
2
3 @section('content')
4 <div class="container">
5 <div class="row justify-content-center">
6 <div class="col-md-8">
7 <div class="card">
8 <div class="card-header">{{ __('Reset Password') }}</div>
9
10 <div class="card-body">
11 <form method="POST" action="{{ route('password.update') }}">
12 @csrf
13
14 <input type="hidden" name="token" value="{{ $token }}">
15
16 <div class="form-group row">
17 <label for="email" class="col-md-4 col-form-label text-md-right">{{ __('E-Mail Address') }}
18
19 <div class="col-md-6">
20 <input id="email" type="email" class="form-control @error('email') is-invalid @enderror"
21
22 <div class="invalid-feedback">
23 @error('email')
24 <span class="invalid-feedback" role="alert">
25 <strong>{{ $message }}</strong>
26 </span>
27 @enderror
28 </div>
29 </div>
30 <div class="form-group row">
31 <label for="password" class="col-md-4 col-form-label text-md-right">{{ __('Password') }}</
32 <div class="col-md-6">
33 <input id="password" type="password" class="form-control @error('password') is-invalid @enderror"
34 </div>
35 </div>
36 <div class="form-group row">
37 <label for="password_confirmation" class="col-md-4 col-form-label text-md-right">{{ __('Confirm Password') }}</
38 <div class="col-md-6">
39 <input id="password_confirmation" type="password" class="form-control @error('password_confirmation') is-invalid @enderror"
40 </div>
41 </div>
42 <div class="form-group row">
43 <div class="col-md-6 offset-md-4">
44 <button type="submit" class="btn btn-primary">{{ __('Reset Password') }}</button>
45 </div>
46 </div>
47 </div>
48 </div>
49 </div>
50 @endsection
51
```

```
File Edit Selection View Go Run Terminal Help reset.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  resources > views > auth > passwords > reset.blade.php > ...
  > css
  > js
  > lang
  > sass
  views
  auth
  passwords
    confirm.blade.php
    email.blade.php
    reset.blade.php
    login.blade.php
    login1.blade.php
    register.blade.php
    verify.blade.php
  layouts
  materi
  user

reset.blade.php
34 <input id="password" type="password" class="form-control @error('password') is-invalid
35
36
37 @error('password')
38 <span class="invalid-feedback" role="alert">
39 <strong>{{ $message }}</strong>
40 </span>
41 @enderror
42 </div>
43
44 <div class="form-group row">
45 <label for="password-confirm" class="col-md-4 col-form-label text-md-right">{{ __('Confirm
46
47 <div class="col-md-6">
48 <input id="password-confirm" type="password" class="form-control" name="password_conf
49 </div>
50 </div>
51
52 <div class="form-group row mb-0">
53 <div class="col-md-6 offset-md-4">
54 <button type="submit" class="btn btn-primary">
55 {{ __('Reset Password') }}
56 </button>
57 </div>
58 </div>
59 </form>
60 </div>
61 </div>
62 </div>
63 </div>
64 </div>
65 @endsection
```

```
File Edit Selection View Go Run Terminal Help login.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  resources > views > auth > passwords > login.blade.php > ...
  > css
  > js
  > lang
  > sass
  views
  auth
  passwords
    confirm.blade.p...
    email.blade.php
    reset.blade.php
    login.blade.php
    login1.blade.php
    register.blade.php
    verify.blade.php
  layouts
  materi
  user

login.blade.php
1 @extends('layouts.app')
2
3 @section('content')
4 <!--begin:Main-->
5 <div class="d-flex flex-column flex-root">
6 <!--begin:Login-->
7 <div class="login login-4 login-sign-in-on d-flex flex-row-fluid" id="kt_login">
8 <div class="d-flex flex-center flex-row-fluid bgi-size-cover bgi-position-top bgi-no-repeat" style="background-imag
9 <!--begin:Login Header-->
10 <div class="login-form text-center p-7 position-relative overflow-hidden">
11 <a href="#">
12 
13 </a>
14 </div>
15 <!--end:Login Header-->
16 <!--begin:Login Sign in form-->
17 <div class="login-signin">
18 <div class="mb-20">
19 <h3>{{ __('Login') }}</h3>
20 <div class="text-muted font-weight-bold">Enter your details to login to your account:</div>
21 </div>
22
23 <form method="POST" action="{{ route('login') }}">
24 @csrf
25 <div class="form-group mb-5">
26 <input id="email" class="form-control @error('email') is-invalid @enderror" type="email" val
27
28 @error('email')
29 <span class="invalid-feedback" role="alert">
30 <strong>{{ $message }}</strong>
31 </span>
32 </div>
33 </form>
```

```
login.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
  ELEARNING_PARIWISATA
    le.php
    > css
    > js
    > lang
    > sass
    > views
      auth
        passwords
          confirm.blade.p...
          email.blade.php
          reset.blade.php
          login.blade.php
          login1.blade.php
          register.blade.php
          verify.blade.php
        layouts
          admin.blade.php
          app.blade.php
          login.blade.php
          master.blade.php
        materi
          create.blade.php
          edit.blade.php
          index.blade.php
        user
          create.blade.php
          edit.blade.php
    > OUTLINE
    > NPM SCRIPTS

login.blade.php
  @enderror
  </div>
  <div class="form-group mb-5">
    <input id="password" type="password" class="form-control @error('password') is-invalid @enderror" value="" />
    @error("password")
      <span class="invalid-feedback" role="alert">
        <strong>{{ $message }}</strong>
      </span>
    @enderror
  </div>
  <div class="form-group d-flex flex-wrap justify-content-between align-items-center">
    <div class="checkbox-inline">
      <label class="form-check-label" for="remember">
        <input class="form-check-input" type="checkbox" name="remember" id="remember" {{ old('remember') ? 'checked' : '' }} />
        <span></span>{{ __('Remember Me') }}</label>
    </div>
    @if (Route::has('password.request'))
      <a class="btn btn-link" href="{{ route('password.request') }}">
        {{ __('Forgot Your Password?') }}
      </a>
    @endif
  </div>
  <button type="submit" id="kt_login_signin_submit" class="btn btn-primary font-weight-bold px-9 py-4">
  </form>

Ln 8, Col 102 Spaces: 4 UTF-8 LF Blade
```

```
login.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
  ELEARNING_PARIWISATA
    resources > views > auth > login.blade.php
    > css
    > js
    > lang
    > sass
    > views
      auth
        passwords
          confirm.blade.p...
          email.blade.php
          reset.blade.php
          login.blade.php
          login1.blade.php
          register.blade.php
          verify.blade.php
        layouts
          admin.blade.php
          app.blade.php
          login.blade.php
          master.blade.php
        materi
          create.blade.php
          edit.blade.php
          index.blade.php
        user
          create.blade.php
          edit.blade.php
    > OUTLINE
    > NPM SCRIPTS

login.blade.php
  @enderror
  </div>
  <div class="form-group d-flex flex-wrap justify-content-between align-items-center">
    <div class="checkbox-inline">
      <label class="form-check-label" for="remember">
        <input class="form-check-input" type="checkbox" name="remember" id="remember" {{ old('remember') ? 'checked' : '' }} />
        <span></span>{{ __('Remember Me') }}</label>
    </div>
    @if (Route::has('password.request'))
      <a class="btn btn-link" href="{{ route('password.request') }}">
        {{ __('Forgot Your Password?') }}
      </a>
    @endif
  </div>
  <button type="submit" id="kt_login_signin_submit" class="btn btn-primary font-weight-bold px-9 py-4">
  </form>
</div>
</div>
</div>
</div>
@endsection

Ln 70, Col 7 Spaces: 4 UTF-8 LF Blade
```

```
login1.blade.php - Elearning_pariwisata - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER
resources > views > auth > login1.blade.php > html > head > base
1 <!DOCTYPE html>
2 <html lang="en">
3 <!--begin:Head-->
4 <head><base href=".." />
5 <meta charset="utf-8" />
6 <title>Login Page 4 | Keenthemes</title>
7 <meta name="description" content="Login page example" />
8 <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no" />
9 <link rel="canonical" href="https://keenthemes.com/metronic" />
10 <!--begin:Fonts-->
11 <link rel="stylesheet" href="https://fonts.googleapis.com/css?family=Poppins:300,400,500,600,700" />
12 <!--end:Fonts-->
13 <!--begin:Page Custom Styles(used by this page)-->
14 <link href="assets/css/pages/login/classic/login-4.css" rel="stylesheet" type="text/css" />
15 <!--end:Page Custom Styles-->
16 <!--begin:Global Theme Styles(used by all pages)-->
17 <link href="assets/plugins/global/plugins/custom/styles/bundle.css" rel="stylesheet" type="text/css" />
18 <link href="assets/plugins/custom/prismjs/prismjs.bundle.css" rel="stylesheet" type="text/css" />
19 <link href="assets/css/style.bundle.css" rel="stylesheet" type="text/css" />
20 <!--end:Global Theme Styles-->
21 <!--begin:Layout Themes(used by all pages)-->
22 <!--end:Layout Themes-->
23 <link rel="shortcut icon" href="assets/media/logos/favicon.ico" />
24 </head>
25 <!--end:Head-->
26 <!--begin:Body-->
27 <body id="kt_body" class="header-fixed header-mobile-fixed subheader-enabled page-loading">
28 <!--begin:Main-->
29 <div class="d-flex flex-column flex-root">
30 <!--begin:Login-->
31 <div class="login login-4 login-signin-on d-flex flex-row-fluid" id="kt_login">
32 <div class="d-flex flex-center flex-row-fluid bgi-size-cover bgi-position-top bgi-no-repeat" style="background-image: url('assets/media/logos/login-4.jpg');">
33 <div class="login-form text-center p-7 position-relative overflow-hidden">
```

```
login1.blade.php - Elearning_pariwisata - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER
resources > views > auth > login1.blade.php > html > head > base
31 <div class="login login-4 login-signin-on d-flex flex-row-fluid" id="kt_login">
32 <div class="d-flex flex-center flex-row-fluid bgi-size-cover bgi-position-top bgi-no-repeat" style="background-image: url('assets/media/logos/login-4.jpg');">
33 <div class="login-form text-center p-7 position-relative overflow-hidden">
34 <!--begin:Login Header-->
35 <div class="d-flex flex-center mb-15">
36 <a href="#">
37 
38 </a>
39 </div>
40 <!--end:Login Header-->
41 <!--begin:Login Sign up form-->
42 <div class="login-signup">
43 <div class="mb-20">
44 <h3>Register</h3>
45 <div class="text-muted font-weight-bold">Enter your details to create your account</div>
46 </div>
47 <form method="POST" action="{{ route('register') }}" enctype="multipart/form-data" id="kt_login">
48 <div class="form-group mb-5">
49 <input id="name" type="text" class="form-control @error('name') is-invalid @enderror" name="name" value="" />
50 <div class="invalid-feedback" style="display: none; margin-top: 5px; font-size: 0.8em; color: #f8d7da; font-weight: normal; padding: 0 0 5px 0; margin: 0 0 0 10px;">
51 @error('name')
52 <span class="invalid-feedback" role="alert">
53 <strong>{{ $message }}</strong>
54 </span>
55 @enderror
56 </div>
57 <div class="form-group mb-5">
58 <input id="email" type="email" class="form-control @error('email') is-invalid @enderror" name="email" value="" />
59 <div class="invalid-feedback" style="display: none; margin-top: 5px; font-size: 0.8em; color: #f8d7da; font-weight: normal; padding: 0 0 5px 0; margin: 0 0 0 10px;">
60 @error('email')
```

```
login1.blade.php - Elearning_pariwisata - Visual Studio Code
login1.blade.php X
resources > views > auth > login1.blade.php > html > head > base
<strong>{{ $message }}</strong>
</span>
@enderror
</div>
<div class="form-group mb-5">
  <input id="no_ponsel" type="text" class="form-control @error('no_ponsel') is-invalid @e
  @error('no_ponsel')
  <span class="invalid-feedback" role="alert">
    <strong>{{ $message }}</strong>
  </span>
@enderror
</div>
<div class="form-group mb-5">
  <input id="password" type="password" class="form-control @error('password') is-invalid
  @error('password')
  <span class="invalid-feedback" role="alert">
    <strong>{{ $message }}</strong>
  </span>
@enderror
</div>
<div class="form-group mb-5">
  <input id="password-confirm" type="password" class="form-control" name="password_confir
</div>
</div>
Ln 4, Col 37 Tab Size 4 UTF-8 CRLF Blade
```

```
login1.blade.php - Elearning_pariwisata - Visual Studio Code
login1.blade.php X
resources > views > auth > login1.blade.php > html > head > base
<label for="avatar" class="col-md-4 col-form-label text-md-right">{{ __('Avatar') }}</l
<input id="avatar" type="file" name="avatar" />
<div class="form-group mb-5 text-left">
  <div class="checkbox-inline">
    <label class="checkbox m-0">
      <input type="checkbox" name="agree" />
      <span></span> I Agree the
      <a href="#" class="font-weight-bold ml-1">terms and conditions</a>.</label>
    </div>
    <div class="form-text text-muted text-center"></div>
  </div>
  <div class="form-group d-flex flex-wrap flex-center mt-10">
    <button id="kt_login_signup_submit" class="btn btn-primary font-weight-bold px-9 py-4 m
  </div>
</form>
</div>
<!--end::Login Sign up form-->
<!--begin::Login forgot password form-->
<div class="login-forgot">
  <div class="mb-20">
    <h3>Forgotten Password ?</h3>
    <div class="text-muted font-weight-bold">Enter your email to reset your password</div>
  </div>
  <form class="form" id="kt_login_forgot_form">
    <div class="form-group mb-10">
      <input class="form-control form-control-solid h-auto py-4 px-8" type="text" placeholder
    </div>
    <div class="form-group d-flex flex-wrap flex-center mt-10">
      <button id="kt_login_forgot_submit" class="btn btn-primary font-weight-bold px-9 py-4 m
      <button id="kt_login_forgot_cancel" class="btn btn-light-primary font-weight-bold px-9
    </div>
  </form>
</div>
Ln 4, Col 37 Tab Size 4 UTF-8 CRLF Blade
```

```
login1.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
resources > views > auth > login1.blade.php
css 123
js 124
lang 125
sass 126
views 127
auth 128
passwords 129
confirm.blade.p... 130
email.blade.php 131
reset.blade.php 132
login.blade.php 133
login1.blade.php 134
register.blade.php 135
verify.blade.php 136
layouts 137
admin.blade.php 138
app.blade.php 139
login.blade.php 140
master.blade.php 141
materi 142
create.blade.php 143
edit.blade.php 144
index.blade.php 145
user 146
create.blade.php 147
edit.blade.php 148
OUTLINE 149
NPM SCRIPTS 150

login1.blade.php
<div class="form-group mb-10">
  <input class="form-control form-control-solid h-auto py-4 px-8" type="text" placeholder
  </div>
  <div class="form-group d-flex flex-wrap flex-center mt-10">
    <button id="kt_login_forgot_submit" class="btn btn-primary font-weight-bold px-9 py-4 m
    <button id="kt_login_forgot_cancel" class="btn btn-light-primary font-weight-bold px-9
  </div>
</form>
</div>
<!--end::Login forgot password form-->
</div>
<!--end::Login-->
<!--end::Main-->
<script>var HOST_URL = "https://preview.keenthemes.com/metronic/theme/html/tools/preview";</script>
<!--begin::Global Config(global config for global JS scripts)-->
<script>var KTAppSettings = { "breakpoints": { "sm": 576, "md": 768, "lg": 992, "xl": 1200, "xxl": 1200 }, "colors"
<!--end::Global Config-->
<!--begin::Global Theme Bundle(used by all pages)-->
<script src="assets/plugins/global/plugins.bundle.js"></script>
<script src="assets/plugins/custom/prismjs/prismjs.bundle.js"></script>
<script src="assets/js/scripts.bundle.js"></script>
<!--end::Global Theme Bundle-->
<!--begin::Page Scripts(used by this page)-->
<script src="assets/js/pages/custom/login/login-general.js"></script>
<!--end::Page Scripts-->
</body>
<!--end::Body-->
</html>
```

```
register.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
resources > views > auth > register.blade.php
css 1
js 2
lang 3
sass 4
views 5
auth 6
passwords 7
confirm.blade.p... 8
email.blade.php 9
reset.blade.php 10
login.blade.php 11
login1.blade.php 12
register.blade.php 13
verify.blade.php 14
layouts 15
admin.blade.php 16
app.blade.php 17
login.blade.php 18
master.blade.php 19
materi 20
create.blade.php 21
edit.blade.php 22
index.blade.php 23
user 24
create.blade.php 25
edit.blade.php 26
OUTLINE 27
NPM SCRIPTS 28

register.blade.php
@extends('layouts.app')
@section('content')
<div class="container">
  <div class="row justify-content-center">
    <div class="col-md-8">
      <div class="card">
        <div class="card-header">{{ __('Register') }}</div>
        <div class="card-body">
          <form method="POST" action="{{ route('register') }}" enctype="multipart/form-data">
            @csrf
            <div class="form-group row">
              <label for="name" class="col-md-4 col-form-label text-md-right">{{ __('Name') }}</label>
              <div class="col-md-6">
                <input id="name" type="text" class="form-control @error('name') is-invalid @enderror" name=
                @error('name')
                <span class="invalid-feedback" role="alert">
                  <strong>{{ $message }}</strong>
                </span>
                @enderror
              </div>
            </div>
            <div class="form-group row">
              <label for="email" class="col-md-4 col-form-label text-md-right">{{ __('E-Mail Address') }}</la
              <div class="col-md-6">
                <input id="email" type="email" class="form-control @error('email') is-invalid @enderror" na
```



```
File Edit Selection View Go Run Terminal Help register.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
resources > views > auth > register.blade.php
  > css
  > js
  > lang
  > sass
  views
  auth
    passwords
      confirm.blade.p...
      email.blade.php
      reset.blade.php
      login.blade.php
      login1.blade.php
      register.blade.php
      verify.blade.php
    layouts
      admin.blade.php
      app.blade.php
      login.blade.php
      master.blade.php
    materi
      create.blade.php
      edit.blade.php
      index.blade.php
    user
      create.blade.php
      edit.blade.php
  > OUTLINE
  > NPM SCRIPTS

register.blade.php
  @error('email')
    <span class="invalid-feedback" role="alert">
      <strong>{{ $message }}</strong>
    </span>
  @enderror
</div>

<div class="form-group row">
  <label for="no_ponsel" class="col-md-4 col-form-label text-md-right">{{ __('Phone Number') }}</label>
  <div class="col-md-6">
    <input id="no_ponsel" type="text" class="form-control @error('no_ponsel') is-invalid @enderror">
    @error('no_ponsel')
      <span class="invalid-feedback" role="alert">
        <strong>{{ $message }}</strong>
      </span>
    @enderror
  </div>
</div>

<div class="form-group row">
  <label for="password" class="col-md-4 col-form-label text-md-right">{{ __('Password') }}</label>
  <div class="col-md-6">
    <input id="password" type="password" class="form-control @error('password') is-invalid @enderror">
    @error('password')
      <span class="invalid-feedback" role="alert">
        <strong>{{ $message }}</strong>
      </span>
    @enderror
  </div>
</div>

Ln 81, Col 51 Spaces: 4 UTF-8 LF Blade
```

```
File Edit Selection View Go Run Terminal Help register.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
resources > views > auth > register.blade.php
  > css
  > js
  > lang
  > sass
  views
  auth
    passwords
      confirm.blade.p...
      email.blade.php
      reset.blade.php
      login.blade.php
      login1.blade.php
      register.blade.php
      verify.blade.php
    layouts
      admin.blade.php
      app.blade.php
      login.blade.php
      master.blade.php
    materi
      create.blade.php
      edit.blade.php
      index.blade.php
    user
      create.blade.php
      edit.blade.php
  > OUTLINE
  > NPM SCRIPTS

register.blade.php
  </div>
</div>

<div class="form-group row">
  <label for="password-confirm" class="col-md-4 col-form-label text-md-right">{{ __('Confirm Passw...
  <div class="col-md-6">
    <input id="password-confirm" type="password" class="form-control" name="password_confirmati...
  </div>
</div>

<div class="form-group row">
  <label for="avatar" class="col-md-4 col-form-label text-md-right">{{ __('Avatar') }}</label>
  <div class="col-md-6">
    <input id="avatar" type="file" name="avatar">
  </div>
</div>

<div class="form-group row mb-8">
  <div class="col-md-6 offset-md-4">
    <button type="submit" class="btn btn-primary">
      {{ __('Register') }}
    </button>
  </div>
</div>
</form>
</div>
</div>
</div>

Ln 81, Col 51 Spaces: 4 UTF-8 LF Blade
```

```
File Edit Selection View Go Run Terminal Help verify.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  > css
  > js
  > lang
  > sass
  > views
  > auth
    > passwords
      verify.blade.php
      confirm.blade.p...
      email.blade.php
      reset.blade.php
      login.blade.php
      login.blade.php
      register.blade.php
      verify.blade.php
    > layouts
      admin.blade.php
      app.blade.php
      login.blade.php
      master.blade.php
    > materi
      create.blade.php
      edit.blade.php
      index.blade.php
    > user
      create.blade.php
      edit.blade.php
  > OUTLINE
  > NPM SCRIPTS

resources > views > auth > verify.blade.php > ...
1 @extends("layouts.app")
2
3 @section('content')
4 <div class="container">
5   <div class="row justify-content-center">
6     <div class="col-md-8">
7       <div class="card">
8         <div class="card-header">{{ __('Verify Your Email Address')}}</div>
9
10        <div class="card-body">
11          @if (session('resent'))
12            <div class="alert alert-success" role="alert">
13              {{ __('A fresh verification link has been sent to your email address.')}}
14            </div>
15          @endif
16
17          {{ __('Before proceeding, please check your email for a verification link.')}}
18          {{ __('If you did not receive the email')}}
19          <form class="d-inline" method="POST" action="{{ route('verification.resend') }}">
20            @csrf
21            <button type="submit" class="btn btn-link p-0 m-0 align-baseline">{{ __('click here to request anot
22          </form>
23        </div>
24      </div>
25    </div>
26  </div>
27 </div>
28 @endsection
29
```

```
File Edit Selection View Go Run Terminal Help app.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  > css
  > js
  > lang
  > sass
  > views
  > auth
  > layouts
    admin.blade.php
    app.blade.php
    login.blade.php
    master.blade.php
  > materi
    create.blade.php
    edit.blade.php
    index.blade.php
  > user
    create.blade.php
    edit.blade.php
    index.blade.php
    home.blade.php
    welcome.blade.php
  > routes
    api.php
    channels.php
    console.php
    web.php
  > OUTLINE
  > NPM SCRIPTS

resources > views > layouts > app.blade.php > html > body#kt_body.header-fixed.header-mobile-fixed.subheader-enabled.page-loading
1 <!doctype html>
2 <html lang="{{ str_replace('_', '-', app()->getLocale()) }}">
3 <head>
4   <meta charset="utf-8">
5   <meta name="description" content="Login page example" />
6   <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no" />
7   <link rel="canonical" href="https://keenthemes.com/metronic" />
8   <!-- Fonts -->
9   <link rel="stylesheet" href="https://fonts.googleapis.com/css?family=Poppins:300,400,500,600,700" />
10  <!-- end:Fonts -->
11  <!-- begin:Page Custom Styles(used by this page)-->
12  <link href="{{ asset('assets/css/pages/login/classic/login-4.css') }}" rel="stylesheet" type="text/css" />
13  <!-- end:Page Custom Styles -->
14  <!-- begin:Global Theme Styles(used by all pages)-->
15  <link href="{{ asset('assets/plugins/global/plugins.bundle.css') }}" rel="stylesheet" type="text/css" />
16  <link href="{{ asset('assets/plugins/custom/prismjs/prismjs.bundle.css') }}" rel="stylesheet" type="text/css" />
17  <link href="{{ asset('assets/css/style.bundle.css') }}" rel="stylesheet" type="text/css" />
18  <!-- end:Global Theme Styles -->
19  <!-- begin:Layout Themes(used by all pages)-->
20  <!-- end:Layout Themes -->
21  <link rel="shortcut icon" href="{{ asset('assets/media/logos/favicon.ico') }}" />
22
23  <!-- CSRF Token -->
24  <meta name="csrf-token" content="{{ csrf_token() }}">
25
26  <title>Elearning Dinas Pariwisata</title>
27
28  <!-- Scripts -->
29  <script src="{{ asset('js/app.js') }}" defer></script>
30
31
32 </head>
33 <body id="kt_body" class="header-fixed header-mobile-fixed subheader-enabled page-loading">
```

```
File Edit Selection View Go Run Terminal Help app.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
resources > views > layouts > app.blade.php > html > body#kt_body.header-fixed.header-mobile-fixed.subheader-enabled.page-loading
32 </head>
33 <body id="kt_body" class="header-fixed header-mobile-fixed subheader-enabled page-loading">
34 <div id="app">
35 <nav class="navbar navbar-expand-md navbar-light bg-white shadow-sm">
36 <div class="container">
37 <a class="navbar-brand" href="{{ url('/') }}">
38 Elearning Dinas Pariwisata
39 </a>
40 <button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarSupportedContent" a
41 <span class="navbar-toggler-icon"></span>
42 </button>
43 <div class="collapse navbar-collapse" id="navbarSupportedContent">
44 <!-- Left Side Of Navbar -->
45 <ul class="navbar-nav mr-auto">
46 </ul>
47 <!-- Right Side Of Navbar -->
48 <ul class="navbar-nav ml-auto">
49 <!-- Authentication Links -->
50 @guest
51 @if (Route::has('login'))
52 <li class="nav-item">
53 <a class="nav-link" href="{{ route('login') }}">{{ __('Login') }}</a>
54 </li>
55 @endif
56 @if (Route::has('register'))
57 <li class="nav-item">
58 <a class="nav-link" href="{{ route('register') }}">{{ __('Register') }}</a>
59 </li>
60 </ul>
61 </div>
62 </nav>
63 </div>
```

```
File Edit Selection View Go Run Terminal Help app.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
resources > views > layouts > app.blade.php > html > body#kt_body.header-fixed.header-mobile-fixed.subheader-enabled.page-loading
61 <li class="nav-item">
62 <a class="nav-link" href="{{ route('register') }}">{{ __('Register') }}</a>
63 </li>
64 @endif
65 @else
66 <li class="nav-item dropdown">
67 <a class="nav-link dropdown-toggle" href="#" role="button" data-toggle=
68 {{ Auth::user()->name }}
69 </a>
70 <div class="dropdown-menu dropdown-menu-right" aria-labelledby="navbarDropdown">
71 <a class="dropdown-item" href="{{ route('logout') }}"
72 onclick="event.preventDefault();
73 document.getElementById('logout-form').submit();"
74 </a>
75 <form id="logout-form" action="{{ route('logout') }}" method="POST" class="d-none">
76 @csrf
77 </form>
78 </div>
79 @endguest
80 </li>
81 </ul>
82 </div>
83 </nav>
84 <main class="py-4">
85 @yield('content')
86 </main>
87 </div>
```

```
File Edit Selection View Go Run Terminal Help app.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
resources > views > layouts > app.blade.php > html > body#kt_body.header-fixed.header-mobile-fixed.subheader-enabled.page-loading
79 @csrf
80 </form>
81 </div>
82 </li>
83 @endguest
84 </ul>
85 </div>
86 </nav>
87 <main class="py-4">
88 @yield('content')
89 </main>
90 </div>
91 <script>var HOST_URL = "https://preview.keenthemes.com/metronic/theme/html/tools/preview";</script>
92 <!--begin:Global Config(global config for global JS scripts)-->
93 <script>var KTAppSettings = { "breakpoints": { "sm": 576, "md": 768, "lg": 992, "xl": 1200, "xxl": 1200 }, "colors"
94 <!--end:Global Config-->
95 <!--begin:Global Theme Bundle(used by all pages)-->
96 <script src="{{asset('assets/plugins/global/plugins.bundle.js')}}"></script>
97 <script src="{{asset('assets/plugins/custom/prismjs/prismjs.bundle.js')}}"></script>
98 <script src="{{asset('assets/js/scripts.bundle.js')}}"></script>
99 <!--end:Global Theme Bundle-->
100 <!--begin:Page Scripts(used by this page)-->
101 <script src="{{asset('assets/js/pages/custom/login/login-general.js')}}"></script>
102 <!--end:Page Scripts-->
103 </body>
104 </html>
105 </div>
106 </div>
107 </div>
```

Ln 33, Col 91 Spaces: 4 UTF-8 Uf Blade

```
login.blade.php - Elearning_pariwisata - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER resources > views > layouts > login.blade.php > ...
1 <!doctype html>
2 <html lang="{{ str_replace('_', '-', app()->getLocale()) }}">
3 <head>
4 <meta charset="utf-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1">
6
7 <!-- CSRF Token -->
8 <meta name="csrf-token" content="{{ csrf_token() }}">
9
10 <title{{ config('app.name', 'Laravel') }}</title>
11
12 <!-- Scripts -->
13 <script src="{{ asset('js/app.js') }}" defer></script>
14
15 <!-- Fonts -->
16 <link rel="dns-prefetch" href="//fonts.gstatic.com">
17 <link href="https://fonts.googleapis.com/css?family=Nunito" rel="stylesheet">
18
19 <!-- Styles -->
20 <link href="{{ asset('css/app.css') }}" rel="stylesheet">
21 </head>
22 <body>
23 <div id="app">
24 <nav class="navbar navbar-expand-md navbar-light bg-white shadow-sm">
25 <div class="container">
26 <a class="navbar-brand" href="{{ url('/') }}">
27 {{ config('app.name', 'Laravel') }}
28 </a>
29 <button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarSupportedContent"
30 <span class="navbar-toggler-icon"></span>
31 </button>
32 <div class="collapse navbar-collapse" id="navbarSupportedContent">
```

```
login.blade.php - Elearning_pariwisata - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER resources > views > layouts > login.blade.php > ...
33 <div class="collapse navbar-collapse" id="navbarSupportedContent">
34 <!-- Left Side Of Navbar -->
35 <ul class="navbar-nav mr-auto">
36
37 </ul>
38
39 <!-- Right Side Of Navbar -->
40 <ul class="navbar-nav ml-auto">
41 <!-- Authentication Links -->
42 @guest
43 <li class="nav-item">
44 <a class="nav-link" href="{{ route('login') }}">{{ __('Login') }}</a>
45 </li>
46 @endif
47
48 <li class="nav-item">
49 <a class="nav-link" href="{{ route('register') }}">{{ __('Register') }}</a>
50 </li>
51 @endif
52 @else
53 <li class="nav-item dropdown">
54 <a id="navbarDropdown" class="nav-link dropdown-toggle" href="#" role="button" data-toggle-
55 {{ Auth::user()->name }}
56 </a>
57
58 <div class="dropdown-menu dropdown-menu-right" aria-labelledby="navbarDropdown">
59 <a class="dropdown-item" href="{{ route('logout') }}"
60 onclick="event.preventDefault();
61 document.getElementById('logout-form').submit();"
62 {{ __('Logout') }}
63 </div>
64 </li>
```

```
login.blade.php - Elearning_pariwisata - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER resources > views > layouts > login.blade.php > ...
65 </div>
66 @endguest
67 </ul>
68 </div>
69 </div>
70 </nav>
71
72 <main class="py-4">
73 @yield('content')
74 </main>
75 </div>
76 </body>
77 </html>
```



```

File Edit Selection View Go Run Terminal Help create.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER create.blade.php X
ELEARNING_PARIWISATA resources > views > materi > create.blade.php > div#kt_content.content.d-flex.flex-column.flex-column-fluid > div.d-flex.flex-column-fluid > div.container > div.card.card-custom
  > css 34
  > js 35
  > lang 36
  > sass 37
  > views 38
  > auth 39
  > layouts 40
  > admin.blade.php 41
  > app.blade.php 42
  > login.blade.php 43
  > master.blade.php 44
  > materi 45
  > create.blade.php 46
  > edit.blade.php 47
  > index.blade.php 48
  > user 49
  > create.blade.php 50
  > edit.blade.php 51
  > index.blade.php 52
  > home.blade.php 53
  > welcome.blade.php 54
  > routes 55
  > api.php 56
  > channels.php 57
  > console.php 58
  > web.php 59
  > OUTLINE 60
  > NPM SCRIPTS 61
  62
  63
  64
  65
resources > views > materi > create.blade.php > div#kt_content.content.d-flex.flex-column.flex-column-fluid > div.d-flex.flex-column-fluid > div.container > div.card.card-custom
  <g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
    <rect x="0" y="0" width="24" height="24" />
    <circle fill="#000000" cx="9" cy="15" r="6" />
    <path d="M8.8012943,7.00241953 C9.83837775,5.20768121 11.7781543,4.14,4 C17.3137085,4 2" />
  </g>
</svg>
<!--end::Svg Icon-->
</span>New Member</a>
<!--end::Button-->
</div>
</div>
<div class="card-body">
  <!--begin::Search Form-->
  <!--begin::Search Form-->
  <div class="mb-7">
    <div class="row align-items-center">
      <div class="col-lg-9 col-xl-8">
        <div class="row align-items-center">
          <div class="col-md-4 my-2 my-md-0">
            <div class="input-icon">
              <input type="text" class="form-control" placeholder="Search..." id="kt_datatable" />
              <span>
                <i class="flaticon2-search-1 text-muted"></i>
              </span>
            </div>
          </div>
          <div class="col-lg-3 col-xl-4 mt-5 mt-lg-0">
            <a href="#" class="btn btn-light-primary px-6 font-weight-bold">Search</a>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
Ln 152, Col 52 Spaces: 4 UTF-8 CRLF Blade

```

```

File Edit Selection View Go Run Terminal Help create.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER create.blade.php X
ELEARNING_PARIWISATA resources > views > materi > create.blade.php > div#kt_content.content.d-flex.flex-column.flex-column-fluid > div.d-flex.flex-column-fluid > div.container > div.card.card-custom
  > css 65
  > js 66
  > lang 67
  > sass 68
  > views 69
  > auth 70
  > layouts 71
  > admin.blade.php 72
  > app.blade.php 73
  > login.blade.php 74
  > master.blade.php 75
  > materi 76
  > create.blade.php 77
  > edit.blade.php 78
  > index.blade.php 79
  > user 80
  > create.blade.php 81
  > edit.blade.php 82
  > index.blade.php 83
  > home.blade.php 84
  > welcome.blade.php 85
  > routes 86
  > api.php 87
  > channels.php 88
  > console.php 89
  > web.php 90
  > OUTLINE 91
  > NPM SCRIPTS 92
  93
  94
  95
  96
  97
resources > views > materi > create.blade.php > div#kt_content.content.d-flex.flex-column.flex-column-fluid > div.d-flex.flex-column-fluid > div.container > div.card.card-custom
  </div>
</div>
<!--end::Search Form-->
<!--end::Search Form-->
<!--begin::Datatable-->
@extends('layouts.master')
@section('content')
  <div class="content d-flex flex-column flex-column-fluid" id="kt_content">
    <!--begin::Subheader-->
    <div class="subheader py-2 py-lg-6 subheader-transparent" id="kt_subheader">
      <div class="container d-flex align-items-center justify-content-between flex-wrap flex-sm-nowrap">
        </div>
      </div>
    <!--end::Subheader-->
    <!--begin::Entry-->
    <div class="d-flex flex-column-fluid">
      <!--begin::Container-->
      <div class="container">
        <!--begin::Notice-->
        <!--end::Notice-->
        <!--begin::Card-->
        <div class="card card-custom">
          <div class="card-header flex-wrap border-0 pt-6 pb-0">
            <div class="card-title">
              <h3 class="card-label">DAFTAR MEMBER
            </div>
          </div>
          <div class="card-toolbar">

```

```
File Edit Selection View Go Run Terminal Help create.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
ELEARNING_PARIWISATA
  > css
  > js
  > lang
  > sass
  > views
  > auth
  > layouts
  admin.blade.php
  app.blade.php
  login.blade.php
  master.blade.php
  materi
  create.blade.php
  edit.blade.php
  index.blade.php
  user
  create.blade.php
  edit.blade.php
  index.blade.php
  home.blade.php
  welcome.blade.php
  routes
  api.php
  channels.php
  console.php
  web.php
  OUTLINE
  NPM SCRIPTS

resources > views > materi > create.blade.php > div#kt_content.content.d-flex.flex-column.flex-column-fluid > div.d-flex.flex-column-fluid > div.container > div.card.card-custom

129 </div>
130 <div class="card-toolbar">
131 <!--begin:Button-->
132 <a href="/user/create" class="btn btn-primary font-weight-bolder">
133 <span class="svg-icon svg-icon-md">
134 <!--begin:Svg Icon | path:assets/media/svg/icons/Design/Flatten.svg-->
135 <svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink" width="24px"
136 <g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
137 <rect x="0" y="0" width="24" height="24" />
138 <circle fill="#000000" cx="9" cy="15" r="6" />
139 </g>
140 </svg>
141 <!--end:Svg Icon-->
142 </span>Materi Baru</a>
143 <!--end:Button-->
144 </div>
145 </div>
146 <div class="card-body">
147 <!--begin:Search Form-->
148 <!--begin:Search Form-->
149 <div class="mb-7">
150 <div class="row align-items-center">
151 <div class="col-lg-9 col-xl-8">
152 <div class="row align-items-center">
153 <div class="col-md-4 my-2 my-md-0">
154 <div class="input-icon">
155 <input type="text" class="form-control" placeholder="Search..." id="kt_datatabl
156 <span>
157 <i class="flaticon2-search-1 text-muted"></i>
158 </span>
159 </div>
```

```
File Edit Selection View Go Run Terminal Help create.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
ELEARNING_PARIWISATA
  > css
  > js
  > lang
  > sass
  > views
  > auth
  > layouts
  admin.blade.php
  app.blade.php
  login.blade.php
  master.blade.php
  materi
  create.blade.php
  edit.blade.php
  index.blade.php
  user
  create.blade.php
  edit.blade.php
  index.blade.php
  home.blade.php
  welcome.blade.php
  routes
  api.php
  channels.php
  console.php
  web.php
  OUTLINE
  NPM SCRIPTS

resources > views > materi > create.blade.php > div#kt_content.content.d-flex.flex-column.flex-column-fluid > div.d-flex.flex-column-fluid > div.container > div.card.card-custom

129 </div>
130 </div>
131 <div class="col-lg-3 col-xl-4 mt-5 mt-lg-0">
132 <a href="#" class="btn btn-light-primary px-6 font-weight-bolder">Search</a>
133 </div>
134 </div>
135 </div>
136 <!--end:Search Form-->
137 <!--end:Search Form-->
138 <!--begin:Datatable-->
139 <div class="card">
140 <div class="card-body">
141 <form method="POST" action="/materi" enctype="multipart/form-data">
142 <csrf
143 <div class="form-group">
144 <label for="nama_berkas">Nama Berkas</label>
145 <input type="text" class="form-control" name="nama_berkas" id="nama_berkas" placeholder="
146 </div>
147 <div class="form-group">
148 <label for="berkas">Berkas</label>
149 <input type="file" class="form-control" name="berkas" id="berkas" placeholder="Masukkan B
150 </div>
151 <div class="form-group">
152 <label for="keterangan">Keterangan</label>
153 <input type="text" class="form-control" id="keterangan" name="keterangan" placeholder="Ma
154 </div>
155 <button type="submit" class="btn btn-primary">Simpan Data</button>
156 </form>
157 </div>
158 </div>
159 </div>
```

```
File Edit Selection View Go Run Terminal Help create.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  > css
  > js
  > lang
  > sass
  > views
  > auth
  > layouts
  create.blade.php
  app.blade.php
  login.blade.php
  master.blade.php
  materi
  create.blade.php
  edit.blade.php
  index.blade.php
  user
  create.blade.php
  edit.blade.php
  index.blade.php
  home.blade.php
  welcome.blade.php
  routes
  api.php
  channels.php
  console.php
  web.php
  > OUTLINE
  > NPM SCRIPTS

resources > views > materi > create.blade.php
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186

<input type="text" class="form-control" id="keterangan" name="keterangan" placeholder="Ma
</div>

<button type="submit" class="btn btn-primary">Simpan Data</button>

</form>
</div>
</div>

<!--end: Datatable-->
</div>
<!--end: Card-->
</div>
<!--end: Container-->
</div>
<!--end: Entry-->
</div>
@endsection

<!--end: Datatable-->
</div>
</div>
<!--end: Card-->
</div>
<!--end: Container-->
</div>
<!--end: Entry-->
</div>
@endsection
```

```
File Edit Selection View Go Run Terminal Help edit.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  > css
  > js
  > lang
  > sass
  > views
  > auth
  > layouts
  create.blade.php
  app.blade.php
  login.blade.php
  master.blade.php
  materi
  create.blade.php
  edit.blade.php
  index.blade.php
  user
  create.blade.php
  edit.blade.php
  index.blade.php
  home.blade.php
  welcome.blade.php
  routes
  api.php
  channels.php
  console.php
  web.php
  > OUTLINE
  > NPM SCRIPTS

resources > views > materi > edit.blade.php > ...
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33

@extends('layouts.master')
@section('content')
<div class="content d-flex flex-column flex-column-fluid" id="kt_content">
  <!--begin: Subheader-->
  <div class="subheader py-2 py-lg-6 subheader-transparent" id="kt_subheader">
    <div class="container d-flex align-items-center justify-content-between flex-wrap flex-sm-nowrap">
      </div>
    </div>
  <!--end: Subheader-->
  <!--begin: Entry-->
  <div class="d-flex flex-column-fluid">
    <!--begin: Container-->
    <div class="container">
      <!--begin: Notice-->
      <!--end: Notice-->
      <!--begin: Card-->
      <div class="card card-custom">
        <div class="card-header flex-wrap border-0 pt-6 pb-0">
          <div class="card-title">
            <h3 class="card-label">DAFTAR MATERI
          </div>
          <div class="card-toolbar">
            <!--begin: Button-->
            <a href="/user/create" class="btn btn-primary font-weight-bolder">
              <span class="svg-icon svg-icon-md">
                <!--begin: Svg Icon | path:assets/media/svg/icons/Design/Flatten.svg-->
                <svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink" width="24px"
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
  <!--end: Entry-->
</div>
</div>
```



```
edit.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  resources > views > materi > edit.blade.php > ...
  > css
  > js
  > lang
  > sass
  > views
  > auth
  > layouts
  admin.blade.php
  app.blade.php
  login.blade.php
  master.blade.php
  materi
    create.blade.php
    edit.blade.php
    index.blade.php
  user
    create.blade.php
    edit.blade.php
    index.blade.php
  home.blade.php
  welcome.blade.php
  routes
    api.php
    channels.php
    console.php
    web.php
  > OUTLINE
  > NPM SCRIPTS

edit.blade.php
<!--begin:Svg Icon | path:assets/media/svg/icons/Design/Flatten.svg-->
<svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink" width="24px"
  <g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
    <rect x="0" y="0" width="24" height="24" />
    <circle fill="#000000" cx="9" cy="15" r="6" />
    <path d="M8.8012943,7.00241953 C9.83837775,5.20768121 11.7781543,4 14,4 C17.3137005,4 20.5862995,4 23.1987057,4" />
  </g>
</svg>
<!--end:Svg Icon-->
</span>Materi Baru</a>
<!--end:Button-->
</div>
</div>
<div class="card-body">
  <!--begin: Search Form-->
  <!--begin: Search Form-->
  <div class="mb-7">
    <div class="row align-items-center">
      <div class="col-lg-9 col-xl-8">
        <div class="row align-items-center">
          <div class="col-md-4 my-2 my-md-0">
            <div class="input-icon">
              <input type="text" class="form-control" placeholder="Search..." id="kt_datatabl" />
              <span>
                <i class="flaticon2-search-1 text-muted"></i>
              </span>
            </div>
          </div>
          <div class="col-lg-3 col-xl-4 mt-5 mt-lg-0">
            <a href="#" class="btn btn-light-primary px-6 font-weight-bold">Search</a>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
```

```
edit.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
ELEARNING_PARIWISATA
  resources > views > materi > edit.blade.php > ...
  > css
  > js
  > lang
  > sass
  > views
  > auth
  > layouts
  admin.blade.php
  app.blade.php
  login.blade.php
  master.blade.php
  materi
    create.blade.php
    edit.blade.php
    index.blade.php
  user
    create.blade.php
    edit.blade.php
    index.blade.php
  home.blade.php
  welcome.blade.php
  routes
    api.php
    channels.php
    console.php
    web.php
  > OUTLINE
  > NPM SCRIPTS

edit.blade.php
</div>
</div>
</div>
<!--end: Search Form-->
<!--end: Search Form-->
<!--begin: Datatable-->
<div class="card">
  <div class="card-body">
    <form action="/materi/{{ $materi->id }}/update" method="POST">
      {{ csrf_field() }}
      <div class="form-group">
        <label for="nama_berkas">Nama Berkas</label>
        <input type="text" class="form-control @error('nama_berkas') is-invalid @enderror"
          id="nama_berkas" placeholder="Nama Berkas" name="nama_berkas" value="{{ $materi->nama_berkas }}" />
        <div class="invalid-feedback">{{ $message }}</div>
        @enderror
      </div>
      <div class="form-group">
        <label for="berkas">Berkas</label>
        <input type="text" class="form-control @error('berkas') is-invalid @enderror"
          id="berkas" placeholder="Berkas" name="berkas" value="{{ $materi->berkas }}" />
        <div class="invalid-feedback">{{ $message }}</div>
        @enderror
      </div>
      <div class="form-group">
        <label for="keterangan">Keterangan</label>
        <input type="text" class="form-control @error('keterangan') is-invalid @enderror"
          id="keterangan" placeholder="Keterangan" name="keterangan" value="{{ $materi->keterangan }}" />
        <div class="invalid-feedback">{{ $message }}</div>
        @enderror
      </div>
    </form>
  </div>
</div>
```

```
File Edit Selection View Go Run Terminal Help      edit.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER      ...      edit.blade.php X
▼ ELEARNING_PARIWISATA      resources > views > materi > edit.blade.php > ...
  > css      84
  > js      85
  > lang      86
  > sass      87
  > views      88
  > auth      89
  > layouts      90
  > admin.blade.php      91
  > app.blade.php      92
  > login.blade.php      93
  > master.blade.php      94
  > materi      95
  > create.blade.php      96
  > edit.blade.php      97
  > index.blade.php      98
  > user      99
  > create.blade.php      100
  > edit.blade.php      101
  > index.blade.php      102
  > home.blade.php      103
  > welcome.blade.php      104
  > routes      105
  > api.php      106
  > channels.php      107
  > console.php      108
  > web.php      109
  > OUTLINE      110
  > NPM SCRIPTS      111

<!--end: Datatable-->
</div>
</div>
<!--end::Card-->
</div>
<!--end::Container-->
</div>
<!--end::Entry-->
</div>
@endsection
```

```
File Edit Selection View Go Run Terminal Help      index.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER      ...      index.blade.php X
▼ ELEARNING_PARIWISATA      resources > views > materi > index.blade.php > ...
  > css      1
  > js      2
  > lang      3
  > sass      4
  > views      5
  > auth      6
  > layouts      7
  > admin.blade.php      8
  > app.blade.php      9
  > login.blade.php      10
  > master.blade.php      11
  > materi      12
  > create.blade.php      13
  > edit.blade.php      14
  > index.blade.php      15
  > user      16
  > create.blade.php      17
  > edit.blade.php      18
  > index.blade.php      19
  > home.blade.php      20
  > welcome.blade.php      21
  > routes      22
  > api.php      23
  > channels.php      24
  > console.php      25
  > web.php      26
  > OUTLINE      27
  > NPM SCRIPTS      28

@extends('layouts.master')
@section('content')
<div class="content d-flex flex-column flex-column-fluid" id="kt_content">
  <!--begin: Subheader-->
  <div class="subheader py-2 py-lg-6 subheader-transparent" id="kt_subheader">
    <div class="container d-flex align-items-center justify-content-between flex-wrap flex-sm-nowrap">
      </div>
    </div>
  <!--end: Subheader-->
  <!--begin: Entry-->
  <div class="d-flex flex-column-fluid">
    <!--begin: Container-->
    <div class="container">
      <!--begin: Notice-->
      </div>
      <!--end: Notice-->
      <!--begin: Card-->
      <div class="card card-custom">
        <div class="card-header flex-wrap border-0 pt-6 pb-0">
          <div class="card-title">
            <h3 class="card-label">DAFTAR MATERI
          </div>
          <div class="alert alert-primary">
            <div class="card-body">
              <!--begin: Search Form-->
              <!--begin: Search Form-->
              <div class="mb-7">
```

```
File Edit Selection View Go Run Terminal Help      index.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER      ...      index.blade.php X
▼ ELEARNING_PARIWISATA      resources > views > materi > index.blade.php > ...
  > css      33
  > js      34
  > lang      35
  > sass      36
  > views      37
  > auth      38
  > layouts      39
  > admin.blade.php      40
  > app.blade.php      41
  > login.blade.php      42
  > master.blade.php      43
  > materi      44
  > create.blade.php      45
  > edit.blade.php      46
  > index.blade.php      47
  > home.blade.php      48
  > welcome.blade.php      49
  > routes      50
  > api.php      51
  > channels.php      52
  > console.php      53
  > web.php      54
  > OUTLINE      55
  > NPM SCRIPTS      56

@if (session('status_del'))
  <div class="alert alert-danger">
    {{ session('status_del')}}
  </div>
@endif

@if (session('status_edit'))
  <div class="alert alert-success">
    {{ session('status_edit')}}
  </div>
@endif

<div class="card-toolbar">
  <!--begin: Button-->
  <a href="/materi/create" class="btn btn-primary font-weight-bolder">
    <span class="svg-icon svg-icon-md">
      <!--begin: Svg Icon-->
      <span>Materi Baru</span>
      </div>
    </div>
  <!--end: Button-->
  </div>
  <div class="card-body">
    <!--begin: Search Form-->
    <!--begin: Search Form-->
    <div class="mb-7">
```

```
File Edit Selection View Go Run Terminal Help index.blade.php - Blearning_pariwisata - Visual Studio Code

EXPLORER
resources > views > materi > index.blade.php > ...
css
js
lang
sass
views
  auth
  layouts
    admin.blade.php
    app.blade.php
    login.blade.php
    master.blade.php
  materi
    create.blade.php
    edit.blade.php
    index.blade.php
  user
    create.blade.php
    edit.blade.php
    index.blade.php
    home.blade.php
    welcome.blade.php
routes
  api.php
  channels.php
  console.php
  web.php
OUTLINE
NPM SCRIPTS

65 <div class="row align-items-center">
66 <div class="col-lg-9 col-xl-8">
67 <div class="row align-items-center">
68 <div class="col-md-4 my-2 my-md-0">
69 <div class="input-icon">
70 <input type="text" class="form-control" placeholder="Search..." id="kt_datatabl
71 <span>
72 <i class="flaticon2-search-1 text-muted"></i>
73 </span>
74 </div>
75 </div>
76 <div class="col-lg-3 col-xl-4 mt-5 mt-lg-0">
77 <a href="#" class="btn btn-light-primary px-6 font-weight-bold">Search</a>
78 </div>
79 </div>
80 </div>
81 </div>
82 </div>
83 </div>
84 <!--end:Search Form-->
85 <!--end: Search Form-->
86 <!--begin: Datatable-->
87 <table class="table table-striped">
88 <thead>
89 <tr>
90 <th scope="col">No</th>
91 <th scope="col">Nama Berkas</th>
92 <th scope="col">Berkas</th>
93 <th scope="col">Keterangan</th>
94 </tr>
95 </thead>
96 </table>
```

```
File Edit Selection View Go Run Terminal Help index.blade.php - Blearning_pariwisata - Visual Studio Code

EXPLORER
resources > views > materi > index.blade.php > ...
css
js
lang
sass
views
  auth
  layouts
    admin.blade.php
    app.blade.php
    login.blade.php
    master.blade.php
  materi
    create.blade.php
    edit.blade.php
    index.blade.php
  user
    create.blade.php
    edit.blade.php
    index.blade.php
    home.blade.php
    welcome.blade.php
routes
  api.php
  channels.php
  console.php
  web.php
OUTLINE
NPM SCRIPTS

98 @foreach($materi as $mat)
99 <tr>
100 <th scope="row">{{ $loop->iteration}}</th>
101 <td>{{ $mat ->nama_berkas}}</td>
102 <td>{{ $mat ->berkas}}</td>
103 <td>{{ $mat ->keterangan}}</td>
104 <td>
105 <a href="materi/{{ $mat -> id }}/edit" class="badge badge-success">Edit</a>
106 <form action="materi/{{ $mat -> id }}" method="post" class="d-inline">
107 @method('delete')
108 @csrf
109 <button type="submit" class="badge badge-danger">Delete</button>
110 </form>
111 </td>
112 </tr>
113 @endforeach
114 </tbody>
115 </table>
116 <!--end: Datatable-->
117 </div>
118 </div>
119 <!--end:Card-->
120 </div>
121 <!--end:Container-->
122 </div>
123 <!--end:Entry-->
```

```
File Edit Selection View Go Run Terminal Help create.blade.php - Blearning_pariwisata - Visual Studio Code

EXPLORER
resources > views > user > create.blade.php > @div#kt_content.content.d-flex.flex-column.flex-column-fluid
css
js
lang
sass
views
  auth
  layouts
    admin.blade.php
    app.blade.php
    login.blade.php
    master.blade.php
  materi
    create.blade.php
    edit.blade.php
    index.blade.php
  user
    create.blade.php
    edit.blade.php
    index.blade.php
    home.blade.php
    welcome.blade.php
routes
  api.php
  channels.php
  console.php
  web.php
OUTLINE
NPM SCRIPTS

1 <div#kt_content.content.d-flex.flex-column.flex-column-fluid
2 <div class="container">
3 <div class="card">
4 <div class="card-header">
5 <div class="card-title">
6 <h3 class="card-label">DAFTAR MEMBER
7 </h3>
8 </div>
9 <div class="card-body">
10 <div class="card-text">
11 <p>
12 <a href="#" class="btn btn-primary font-weight-bolder">
13 <span class="svg-icon svg-icon-md">
14 <!--begin:Svg Icon | path:assets/media/svg/icons/Design/Flatten.svg-->
15 <!--end:Svg Icon-->
16 </a>
17 </div>
18 </div>
19 </div>
20 </div>
21 </div>
22 </div>
23 </div>
24 </div>
25 </div>
26 </div>
27 </div>
28 </div>
29 </div>
30 </div>
31 </div>
32 </div>
```

```
File Edit Selection View Go Run Terminal Help create.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER create.blade.php X
resources > views > user > create.blade.php > div#kt_content.content.d-flex.flex-column.flex-column-fluid
css 33
js 34
lang 35
sass 36
views 37
auth 38
layouts 39
admin.blade.php 40
app.blade.php 41
login.blade.php 42
master.blade.php 43
materi 44
create.blade.php 45
edit.blade.php 46
index.blade.php 47
user 48
create.blade.php 49
edit.blade.php 50
index.blade.php 51
home.blade.php 52
welcome.blade.php 53
routes 54
api.php 55
channels.php 56
console.php 57
web.php 58
OUTLINE 59
NPM SCRIPTS 60
</div>
<!--end:Search Form-->
<!--end:Search Form-->
<!--begin:Datatable-->
@extends('layouts.master')
ion('content')
class="content d-flex flex-column flex-column-fluid" id="kt_content">
<!--begin:Subheader-->
div class="subheader py-2 py-lg-6 subheader-transparent" id="kt_subheader">
<div class="container d-flex align-items-center justify-content-between flex-wrap flex-sm-nowrap">
</div>
</div>
<!--end:Subheader-->
<!--begin:Entry-->
div class="d-flex flex-column-fluid">
<!--begin:Container-->
<div class="container">
<!--begin:Notice-->
<!--end:Notice-->
<!--begin:Card-->
<div class="card card-custom">
<div class="card-header flex-wrap border-0 pt-6 pb-0">
<div class="card-title">
<h3 class="card-label">DAFTAR MEMBER
</div>
</div>
<div class="card-toolbar">
<!--begin:Button-->
<div class="card-toolbar">
<!--begin:Button-->
<a href="/user/create" class="btn btn-primary font-weight-bolder">
<span class="svg-icon svg-icon-md">
<!--begin:Svg Icon | path:assets/media/svg/icons/Design/Flatten.svg-->
<svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink" width="24px" heig
<g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
<rect x="0" y="0" width="24" height="24" />
<circle fill="#000000" cx="9" cy="15" r="6" />
<path d="M8.8012943,7.00241953 C9.83837775,5.20768121 11.7781543,4 14,4 C17.3137085,4 20,6.6
</g>
</svg>
<!--end:Svg Icon-->
</span>New Member</a>
<!--end:Button-->
</div>
</div>
<div class="card-body">
<!--begin:Search Form-->
<!--begin:Search Form-->
<div class="mb-7">
<div class="row align-items-center">
<div class="col-lg-9 col-xl-8">
<div class="row align-items-center">
<div class="col-md-4 my-2 my-md-0">
<div class="input-icon">
<input type="text" class="form-control" placeholder="Search..." id="kt_datatable_sea
<span>
<i class="flaticon2-search-1 text-muted"></i>
</span>
</div>
</div>
</div>
<div class="col-lg-3 col-xl-4 mt-5 mt-lg-0">
<a href="#" class="btn btn-light-primary px-6 font-weight-bolder">Search</a>
</div>
</div>
</div>
</div>
</div>
```

```
File Edit Selection View Go Run Terminal Help create.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER create.blade.php X
resources > views > user > create.blade.php > div#kt_content.content.d-flex.flex-column.flex-column-fluid
css 66
js 67
lang 68
sass 69
views 70
auth 71
layouts 72
admin.blade.php 73
app.blade.php 74
login.blade.php 75
master.blade.php 76
materi 77
create.blade.php 78
edit.blade.php 79
index.blade.php 80
user 81
create.blade.php 82
edit.blade.php 83
index.blade.php 84
home.blade.php 85
welcome.blade.php 86
routes 87
api.php 88
channels.php 89
console.php 90
web.php 91
OUTLINE 92
NPM SCRIPTS 93
</div>
<!--end:Search Form-->
<!--end:Search Form-->
<!--begin:Datatable-->
@extends('layouts.master')
ion('content')
class="content d-flex flex-column flex-column-fluid" id="kt_content">
<!--begin:Subheader-->
div class="subheader py-2 py-lg-6 subheader-transparent" id="kt_subheader">
<div class="container d-flex align-items-center justify-content-between flex-wrap flex-sm-nowrap">
</div>
</div>
<!--end:Subheader-->
<!--begin:Entry-->
div class="d-flex flex-column-fluid">
<!--begin:Container-->
<div class="container">
<!--begin:Notice-->
<!--end:Notice-->
<!--begin:Card-->
<div class="card card-custom">
<div class="card-header flex-wrap border-0 pt-6 pb-0">
<div class="card-title">
<h3 class="card-label">DAFTAR MEMBER
</div>
</div>
<div class="card-toolbar">
<!--begin:Button-->
<div class="card-toolbar">
<!--begin:Button-->
<a href="/user/create" class="btn btn-primary font-weight-bolder">
<span class="svg-icon svg-icon-md">
<!--begin:Svg Icon | path:assets/media/svg/icons/Design/Flatten.svg-->
<svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink" width="24px" heig
<g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
<rect x="0" y="0" width="24" height="24" />
<circle fill="#000000" cx="9" cy="15" r="6" />
<path d="M8.8012943,7.00241953 C9.83837775,5.20768121 11.7781543,4 14,4 C17.3137085,4 20,6.6
</g>
</svg>
<!--end:Svg Icon-->
</span>New Member</a>
<!--end:Button-->
</div>
</div>
<div class="card-body">
<!--begin:Search Form-->
<!--begin:Search Form-->
<div class="mb-7">
<div class="row align-items-center">
<div class="col-lg-9 col-xl-8">
<div class="row align-items-center">
<div class="col-md-4 my-2 my-md-0">
<div class="input-icon">
<input type="text" class="form-control" placeholder="Search..." id="kt_datatable_sea
<span>
<i class="flaticon2-search-1 text-muted"></i>
</span>
</div>
</div>
</div>
<div class="col-lg-3 col-xl-4 mt-5 mt-lg-0">
<a href="#" class="btn btn-light-primary px-6 font-weight-bolder">Search</a>
</div>
</div>
</div>
</div>
</div>
```

```
File Edit Selection View Go Run Terminal Help create.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER create.blade.php X
resources > views > user > create.blade.php > div#kt_content.content.d-flex.flex-column.flex-column-fluid
css 97
js 98
lang 99
sass 100
views 101
auth 102
layouts 103
admin.blade.php 104
app.blade.php 105
login.blade.php 106
master.blade.php 107
materi 108
create.blade.php 109
edit.blade.php 110
index.blade.php 111
user 112
create.blade.php 113
edit.blade.php 114
index.blade.php 115
home.blade.php 116
welcome.blade.php 117
routes 118
api.php 119
channels.php 120
console.php 121
web.php 122
OUTLINE 123
NPM SCRIPTS 124
</div>
<!--begin:Button-->
<div class="card-toolbar">
<!--begin:Button-->
<a href="/user/create" class="btn btn-primary font-weight-bolder">
<span class="svg-icon svg-icon-md">
<!--begin:Svg Icon | path:assets/media/svg/icons/Design/Flatten.svg-->
<svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink" width="24px" heig
<g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
<rect x="0" y="0" width="24" height="24" />
<circle fill="#000000" cx="9" cy="15" r="6" />
<path d="M8.8012943,7.00241953 C9.83837775,5.20768121 11.7781543,4 14,4 C17.3137085,4 20,6.6
</g>
</svg>
<!--end:Svg Icon-->
</span>New Member</a>
<!--end:Button-->
</div>
</div>
<div class="card-body">
<!--begin:Search Form-->
<!--begin:Search Form-->
<div class="mb-7">
<div class="row align-items-center">
<div class="col-lg-9 col-xl-8">
<div class="row align-items-center">
<div class="col-md-4 my-2 my-md-0">
<div class="input-icon">
<input type="text" class="form-control" placeholder="Search..." id="kt_datatable_sea
<span>
<i class="flaticon2-search-1 text-muted"></i>
</span>
</div>
</div>
</div>
<div class="col-lg-3 col-xl-4 mt-5 mt-lg-0">
<a href="#" class="btn btn-light-primary px-6 font-weight-bolder">Search</a>
</div>
</div>
</div>
</div>
</div>
```



```

edit.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
ELEARNING_PARIWISATA
css
js
lang
sass
views
  auth
  layouts
  user
    create.blade.php
    edit.blade.php
    index.blade.php
    home.blade.php
    welcome.blade.php
  routes
    api.php
    channels.php
    console.php
    web.php
    OUTLINE
    NPM SCRIPTS
resources > views > user > edit.blade.php
edit.blade.php X
<!--begin::Svg Icon-->
<svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink" width="24px"
  <g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
    <rect x="0" y="0" width="24" height="24" />
    <circle fill="#000000" cx="9" cy="15" r="6" />
    <path d="M8.8012943,7.00241953 C9.83837775,5.20768121 11.7781543,4 14,4 C17.3137085,4 20.5862915,4 23.1987057,4" />
  </g>
</svg>
<!--end::Svg Icon-->
</span>New Member</a>
<!--end::Button-->
</div>
<div class="card-body">
  <!--begin::Search Form-->
  <!--begin::Search Form-->
  <div class="mb-7">
    <div class="row align-items-center">
      <div class="col-lg-9 col-xl-8">
        <div class="row align-items-center">
          <div class="col-md-4 my-2 my-md-0">
            <div class="input-icon">
              <input type="text" class="form-control" placeholder="Search..." id="kt_datatabl
                <span>
                  <i class="flaticon2-search-1 text-muted"></i>
                </span>
            </div>
          </div>
          <div class="col-lg-3 col-xl-4 mt-5 mt-lg-0">
            <a href="#" class="btn btn-light-primary px-6 font-weight-bold">Search</a>
          </div>
        </div>
      </div>
    </div>
  </div>
  </div>
  </div>
  </div>
  </div>
  <!--end::Search Form-->
  <!--end::Search Form-->
  <!--begin::Datatable-->
  <div class="card">
    <div class="card-body">
      <form action="/user/{{ $users->id }}/update" method="POST">
        {{ csrf_field() }}
        <div class="form-group">
          <label for="name">Nama Lengkap</label>
          <input type="text" class="form-control @error('name') is-invalid @enderror"
            id="name" placeholder="Nama Lengkap" name="name" value="{{ $users->name }}">
          @error('name')
            <div class="invalid-feedback">{{ $message }}</div>
          @enderror
        </div>
        <div class="form-group">
          <label for="email">Email</label>
          <input type="text" class="form-control @error('email') is-invalid @enderror"
            id="email" placeholder="Email" name="email" value="{{ $users->email }}">
          @error('email')
            <div class="invalid-feedback">{{ $message }}</div>
          @enderror
        </div>
        <div class="form-group">
          <label for="no_ponsel">Nomor Ponsel</label>

```

```

edit.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
ELEARNING_PARIWISATA
css
js
lang
sass
views
  auth
  layouts
  user
    create.blade.php
    edit.blade.php
    index.blade.php
    home.blade.php
    welcome.blade.php
  routes
    api.php
    channels.php
    console.php
    web.php
    OUTLINE
    NPM SCRIPTS
resources > views > user > edit.blade.php
edit.blade.php X
</div>
</div>
</div>
</div>
</div>
<!--end::Search Form-->
<!--end::Search Form-->
<!--begin::Datatable-->
<div class="card">
  <div class="card-body">
    <form action="/user/{{ $users->id }}/update" method="POST">
      {{ csrf_field() }}
      <div class="form-group">
        <label for="name">Nama Lengkap</label>
        <input type="text" class="form-control @error('name') is-invalid @enderror"
          id="name" placeholder="Nama Lengkap" name="name" value="{{ $users->name }}">
        @error('name')
          <div class="invalid-feedback">{{ $message }}</div>
        @enderror
      </div>
      <div class="form-group">
        <label for="email">Email</label>
        <input type="text" class="form-control @error('email') is-invalid @enderror"
          id="email" placeholder="Email" name="email" value="{{ $users->email }}">
        @error('email')
          <div class="invalid-feedback">{{ $message }}</div>
        @enderror
      </div>
      <div class="form-group">
        <label for="no_ponsel">Nomor Ponsel</label>

```

```
edit.blade.php - Elearning_pariwisata - Visual Studio Code

@error('email')
<div class="invalid-feedback">{{ $message }}</div>
@enderror
</div>
<div class="form-group">
<label for="no_ponsel">Nomor Ponsel</label>
<input type="text" class="form-control" id="no_ponsel" placeholder="Nomor Ponsel"
name="no_ponsel" value="{{ $users->no_ponsel }}" />
</div>
<div class="form-group">
<label for="password">Password</label>
<input type="password" class="form-control" id="password" placeholder="Password"
name="password" value="{{ $users->password }}" />
</div>
<button type="submit" class="btn btn-primary">Save Changes</button>
</form>
</div>
</div>
<!--end: Datatable-->
</div>
</div>
<!--end:Card-->
</div>
<!--end:Container-->
</div>
<!--end:Entry-->
</div>
@endsection
```

```
index.blade.php - Elearning_pariwisata - Visual Studio Code

@extends("layouts.master")

@section("content")

<div class="content d-flex flex-column flex-column-fluid" id="kt_content">
<!--begin:Subheader-->
<div class="subheader py-2 py-lg-6 subheader-transparent" id="kt_subheader">
<div class="container d-flex align-items-center justify-content-between flex-wrap flex-sm-nowrap">

</div>
</div>
<!--end:Subheader-->
<!--begin:Entry-->
<div class="d-flex flex-column-fluid">
<!--begin:Container-->
<div class="container">
<!--begin:Notice-->
<!--end:Notice-->
<!--begin:Card-->
<div class="card card-custom">
<div class="card-header flex-wrap border-0 pt-6 pb-0">
<div class="card-title">
<h3 class="card-label">DAFTAR MEMBER
</div>

@if (session('status'))
<div class="alert alert-primary">
{{ session('status')}}
</div>
@endif
```

```
index.blade.php - Elearning_pariwisata - Visual Studio Code

@if (session('status_del'))
<div class="alert alert-danger">
{{ session('status_del')}}
</div>
@endif

@if (session('status_edit'))
<div class="alert alert-success">
{{ session('status_edit')}}
</div>
@endif

<div class="card-toolbar">
<!--begin:Button-->
<a href="/user/create" class="btn btn-primary font-weight-bolder">
<span class="svg-icon svg-icon-md">
<!--begin:Svg Icon | path:assets/media/svg/icons/Design/Flatten.svg-->
<svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink" width="24px"
<g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
<rect x="0" y="0" width="24" height="24" />
<circle fill="#000000" cx="9" cy="15" r="6" />
</g>
</svg>
<!--end:Svg Icon-->
</span>New Member</a>
<!--end:Button-->
</div>
</div>
<!--begin:Search Form-->
<!--end:Search Form-->
```

```
index.blade.php - Elearning_pariwisata - Visual Studio Code
index.blade.php
<div class="mb-7">
  <div class="row align-items-center">
    <div class="col-lg-9 col-xl-8">
      <div class="row align-items-center">
        <div class="col-md-4 my-2 my-md-0">
          <div class="input-icon">
            <input type="text" class="form-control" placeholder="Search..." id="kt_datatabl
            <span
              <i class="flaticon-search-1 text-muted"></i>
            </span>
          </div>
        </div>
        <div class="col-lg-3 col-xl-4 mt-5 mt-lg-0">
          <a href="#" class="btn btn-light-primary px-6 font-weight-bold">Search</a>
        </div>
      </div>
    </div>
  </div>
<!--end: Search Form-->
<!--end: Search Form-->
<!--begin: Datatable-->
<table class="table table-striped">
  <thead>
    <tr>
      <th scope="col">No</th>
      <th scope="col">Nama Lengkap</th>
      <th scope="col">E-mail</th>
      <th scope="col">Nomor Ponsel</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <th scope="col">Foto Profil</th>
      <th scope="col">Action</th>
    </tr>
  </tbody>
</table>
<!--end: Datatable-->
</div>
```

```
index.blade.php - Elearning_pariwisata - Visual Studio Code
index.blade.php
<tbody>
  <tr>
    <td>
      @foreach($users as $us)
        <tr>
          <th scope="row">{{ $loop->iteration }}</th>
          <td>{{ $us ->name }}</td>
          <td>{{ $us ->email }}</td>
          <td>{{ $us ->no_ponsel }}</td>
          <td>{{ $us ->avatar }}</td>
          <td>
            <a href="user/{{ $us -> id }}/edit" class="badge badge-success">Edit</a>
            <form action="user/{{ $us -> id }}" method="post" class="d-inline">
              @method('delete')
              @csrf
              <button type="submit" class="badge badge-danger">Delete</button>
            </form>
          </td>
        </tr>
      </tbody>
    </table>
  </tbody>
</table>
<!--end: Datatable-->
</div>
```

```
index.blade.php - Elearning_pariwisata - Visual Studio Code
index.blade.php
<tbody>
  <tr>
    <td>
      @foreach($users as $us)
        <tr>
          <th scope="row">{{ $loop->iteration }}</th>
          <td>{{ $us ->name }}</td>
          <td>{{ $us ->email }}</td>
          <td>{{ $us ->no_ponsel }}</td>
          <td>{{ $us ->avatar }}</td>
          <td>
            <a href="user/{{ $us -> id }}/edit" class="badge badge-success">Edit</a>
            <form action="user/{{ $us -> id }}" method="post" class="d-inline">
              @method('delete')
              @csrf
              <button type="submit" class="badge badge-danger">Delete</button>
            </form>
          </td>
        </tr>
      </tbody>
    </table>
  </tbody>
</table>
<!--end: Datatable-->
</div>
<!--end: Card-->
</div>
<!--end: Container-->
</div>
<!--end: Entry-->
</div>
@endsection
```



```
File Edit Selection View Go Run Terminal Help home.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
resources > views > home.blade.php > div.d-flex.flex-column-fluid > div.container > div.row.mt-0.mt-lg-3 > div.col-xl-4 > div.card.card-custom.gutter-b.card-stretch > div
1 @extends('layouts.admin')
2
3 <section('content')
4
5 <!--begin:Entry-->
6 <div class="d-flex flex-column-fluid">
7 <!--begin:Container-->
8 <div class="container">
9 <!--begin:Dashboard-->
10 <!--begin:Row-->
11 <div class="row mt-0 mt-lg-3">
12 <div class="col-xl-4">
13 <!--begin:Mixed Widget 17-->
14 <div class="card card-custom gutter-b card-stretch">
15 <!--begin:Header-->
16 <div class="card-header border-0 pt-5">
17 <div class="card-title font-weight-bolder">
18 <div class="card-label">Member Stats
19 <div class="font-size-sm text-muted mt-2">5</div></div></div>
20 </div>
21 </div>
22 </div>
23 <!--end:Header-->
24 <!--begin:Body-->
25 <div class="card-body p-0 d-flex flex-column">
26 <!--begin:Items-->
27 <div class="flex-grow-1 card-spacer">
28 <div class="row row-paddingless mt-5 mb-10">
29 <!--begin:Item-->
30 <div class="col">
31 <div class="d-flex align-items-center mr-2">
32 <!--begin:Symbol-->
33 <div class="symbol symbol-45 symbol-light-info mr-4 flex-shrink-0">
```

```
File Edit Selection View Go Run Terminal Help home.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
resources > views > home.blade.php > div.d-flex.flex-column-fluid > div.container > div.row.mt-0.mt-lg-3 > div.col-xl-4 > div.card.card-custom.gutter-b.card-stretch > div
34 <span class="svg-icon svg-icon-lg svg-icon-info">
35 <!--begin:Svg Icon | path:assets/media/svg/icons/Shopping/Cart3.svg-->
36 <svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/
37 <g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
38 <rect x="0" y="0" width="24" height="24" />
39 <path d="M12,4.56284994 L7.76022128,9.6401844 C7,4146572,10.064
40 <path d="M9.5,9 L20.5,9 C21.0522847,9 21.5,9.44771525 21.5,10 C
41 </g>
42 </svg>
43 </span>
44 </div>
45 </div>
46 </div>
47 <!--end:Symbol-->
48 <!--begin:Title-->
49 <div>
50 <div class="font-size-h4 text-dark-75 font-weight-bolder">1</div>
51 <div class="font-size-sm text-muted font-weight-bold mt-1">Admin</div>
52 </div>
53 </div>
54 </div>
55 </div>
56 </div>
57 <!--end:Item-->
58 <!--begin:Item-->
59 <div class="col">
60 <div class="d-flex align-items-center mr-2">
61 <!--begin:Symbol-->
62 <div class="symbol symbol-45 symbol-light-danger mr-4 flex-shrink-0">
63 <div class="symbol-label">
64 <span class="svg-icon svg-icon-lg svg-icon-danger">
65 <!--begin:Svg Icon | path:assets/media/svg/icons/Home/Library.svg-->
```

```
File Edit Selection View Go Run Terminal Help home.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER
resources > views > home.blade.php > div.d-flex.flex-column-fluid > div.container > div.row.mt-0.mt-lg-3 > div.col-xl-4 > div.card.card-custom.gutter-b.card-stretch > div
66 <!--begin:Svg Icon | path:assets/media/svg/icons/Home/Library.svg-->
67 <svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/
68 <g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
69 <rect x="0" y="0" width="24" height="24" />
70 <path d="M5,3 L6,3 C6.55228475,3 7,3.44771525 7,4 L7,20 C7,20.5
71 <rect fill="#000000" opacity="0.3" transform="translate(17.0255
72 </g>
73 </svg>
74 </span>
75 </div>
76 </div>
77 </div>
78 <!--end:Symbol-->
79 <!--begin:Title-->
80 <div>
81 <div class="font-size-h4 text-dark-75 font-weight-bolder">4</div>
82 <div class="font-size-sm text-muted font-weight-bold mt-1">Member</div>
83 </div>
84 </div>
85 </div>
86 </div>
87 <!--end:Widget Item-->
88 </div>
89 <!--end:Items-->
90 <!--begin:Chart-->
91 <div id="kt_mixed_widget_17_chart" class="card-rounded-bottom" data-color="primary" style="height:
92 <!--end:Chart-->
93 </div>
94 </div>
95 </div>
96 <!--end:Mixed Widget 17-->
```

```

File Edit Selection View Go Run Terminal Help home.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER home.blade.php x
resources > views > home.blade.php > div.d-flex.flex-column-fluid > div.container > div.row.mt-0.mt-lg-3 > div.col-xl-4 > div.card.card-custom.gutter-b.card-stretch > div
css 97 </div>
js 98 <div class="col-xl-4">
lang 99 <!--begin::Mixed Widget 17-->
sass 100 <div class="card card-custom gutter-b card-stretch">
views 101 <!--begin::Header-->
auth 102 <div class="card-header border-0 pt-5">
layouts 103 <div class="card-title font-weight-bolder">
admin.blade.php 104 <div class="card-label">Materi Stats
app.blade.php 105 <div class="font-size-sm text-muted mt-2">3</div></div>
login.blade.php 106 </div>
master.blade.php 107 <!--end::Header-->
materi 108 <!--begin::Body-->
create.blade.php 109 <div class="card-body p-0 d-flex flex-column">
edit.blade.php 110 <!--begin::Items-->
index.blade.php 111 <div class="flex-grow-1 card-spacer">
home.blade.php 112 <div class="row row-paddinglest mt-5 mb-10">
welcome.blade.php 113 <!--begin::Item-->
routes 114 <div class="col">
api.php 115 <div class="d-flex align-items-center mr-2">
channels.php 116 <!--begin::Symbol-->
console.php 117 <div class="symbol symbol-45 symbol-light-info mr-4 flex-shrink-0">
web.php 118 <div class="symbol-label">
outline 119 <span class="svg-icon svg-icon-lg svg-icon-info">
npm_scripts 120 <!--begin::Svg Icon | path:assets/media/svg/icons/Shopping/Cart3.svg-->
css 121 <svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink"
js 122 <g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
lang 123 <rect x="0" y="0" width="24" height="24" />
sass 124 <path d="M12,4.56204994 L7.7682128,9.6481844 C7,4146572,10.0644613 6.7840
login.blade.php 125 <path d="M3,5,9 L20,5,9 C21.0522847,9 21,5,9.44771525 21,5,10 C21,5,10,132
materi 126 </g>
create.blade.php 127 </svg>
edit.blade.php 128 </span>
index.blade.php 129 </div>
home.blade.php 130 <!--end::Svg Icon-->
welcome.blade.php 131 </span>
routes 132 </div>
api.php 133 </div>
channels.php 134 <!--end::Symbol-->
console.php 135 <!--begin::Title-->
web.php 136 <div>
outline 137 <div class="font-size-h4 text-dark-75 font-weight-bolder">3</div>
npm_scripts 138 <div class="font-size-sm text-muted font-weight-bold mt-1">Materi</div>
css 139 </div>
js 140 <!--end::Title-->
lang 141 </div>
sass 142 </div>
views 143 <!--end::Item-->
auth 144 <!--begin::Item-->
layouts 145 <div class="col">
admin.blade.php 146 <div class="d-flex align-items-center mr-2">
app.blade.php 147 <!--begin::Symbol-->
login.blade.php 148 <div class="symbol symbol-45 symbol-light-danger mr-4 flex-shrink-0">
master.blade.php 149 <div class="symbol-label">
materi 150 <span class="svg-icon svg-icon-lg svg-icon-danger">
create.blade.php 151 <!--begin::Svg Icon | path:assets/media/svg/icons/Home/Library.svg-->
edit.blade.php 152 <svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink"
index.blade.php 153 <g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
home.blade.php 154 <rect x="0" y="0" width="24" height="24" />
welcome.blade.php 155 <path d="M5,3 L6,3 C6.55228475,3 7,3,44771525 7,4 L7,20 C7,20,5522847 6,55
routes 156 <rect fill="#000000" opacity="0.3" transform="translate(17.825568, 11.9455
api.php 157 </g>
channels.php 158 </svg>
console.php 159 <!--end::Svg Icon-->
web.php 160 </span>
outline 161 </div>
npm_scripts 162 </div>
css 163 </div>
js 164 <!--end::Symbol-->
lang 165 <!--begin::Title-->
sass 166 <div>
views 167 <div class="font-size-h4 text-dark-75 font-weight-bolder">3</div>
auth 168 <div class="font-size-sm text-muted font-weight-bold mt-1">Bab</div>
layouts 169 </div>
admin.blade.php 170 <!--end::Title-->
app.blade.php 171 </div>
login.blade.php 172 <!--end::Widget Item-->
master.blade.php 173 </div>
materi 174 <!--end::Items-->
create.blade.php 175 <!--begin::Chart-->
edit.blade.php 176 <div id="kt_mixed_widget_17_chart" class="card-rounded-bottom data-color="primary" style="height: 200px">
index.blade.php 177 <!--end::Chart-->
home.blade.php 178 </div>
welcome.blade.php 179 <!--end::Body-->
routes 180 </div>
api.php 181 <!--end::Mixed Widget 17-->
channels.php 182 </div>
console.php 183 </div>
web.php 184 </div>
outline 185 </div>
npm_scripts 186 <!--end::Container-->

```

```

File Edit Selection View Go Run Terminal Help home.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER home.blade.php x
resources > views > home.blade.php > div.d-flex.flex-column-fluid > div.container > div.row.mt-0.mt-lg-3 > div.col-xl-4 > div.card.card-custom.gutter-b.card-stretch > div
css 129 </div>
js 130 <!--end::Svg Icon-->
lang 131 </span>
sass 132 </div>
views 133 </div>
auth 134 <!--end::Symbol-->
layouts 135 <!--begin::Title-->
admin.blade.php 136 <div>
app.blade.php 137 <div class="font-size-h4 text-dark-75 font-weight-bolder">3</div>
login.blade.php 138 <div class="font-size-sm text-muted font-weight-bold mt-1">Materi</div>
master.blade.php 139 </div>
materi 140 <!--end::Title-->
create.blade.php 141 </div>
edit.blade.php 142 <!--end::Item-->
index.blade.php 143 <!--begin::Item-->
home.blade.php 144 <div class="col">
welcome.blade.php 145 <div class="d-flex align-items-center mr-2">
routes 146 <!--begin::Symbol-->
api.php 147 <div class="symbol symbol-45 symbol-light-danger mr-4 flex-shrink-0">
channels.php 148 <div class="symbol-label">
console.php 149 <span class="svg-icon svg-icon-lg svg-icon-danger">
web.php 150 <!--begin::Svg Icon | path:assets/media/svg/icons/Home/Library.svg-->
outline 151 <svg xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink"
npm_scripts 152 <g stroke="none" stroke-width="1" fill="none" fill-rule="evenodd">
css 153 <rect x="0" y="0" width="24" height="24" />
js 154 <path d="M5,3 L6,3 C6.55228475,3 7,3,44771525 7,4 L7,20 C7,20,5522847 6,55
lang 155 <rect fill="#000000" opacity="0.3" transform="translate(17.825568, 11.9455
sass 156 </g>
views 157 </svg>
auth 158 <!--end::Svg Icon-->
layouts 159 </span>
admin.blade.php 160 </div>
app.blade.php 161 </div>
login.blade.php 162 <!--end::Symbol-->
master.blade.php 163 <!--begin::Title-->
materi 164 <div>
create.blade.php 165 <div class="font-size-h4 text-dark-75 font-weight-bolder">3</div>
edit.blade.php 166 <div class="font-size-sm text-muted font-weight-bold mt-1">Bab</div>
index.blade.php 167 </div>
home.blade.php 168 <!--end::Title-->
welcome.blade.php 169 </div>
routes 170 <!--end::Widget Item-->
api.php 171 </div>
channels.php 172 <!--end::Items-->
console.php 173 <!--begin::Chart-->
web.php 174 <div id="kt_mixed_widget_17_chart" class="card-rounded-bottom data-color="primary" style="height: 200px">
outline 175 <!--end::Chart-->
npm_scripts 176 </div>
css 177 <!--end::Body-->
js 178 </div>
lang 179 <!--end::Mixed Widget 17-->
sass 180 </div>
views 181 </div>
auth 182 </div>
layouts 183 </div>
admin.blade.php 184 </div>
app.blade.php 185 </div>
login.blade.php 186 </div>
master.blade.php 187 </div>
materi 188 </div>
create.blade.php 189 </div>
edit.blade.php 190 </div>
index.blade.php 191 </div>
home.blade.php 192 </div>
welcome.blade.php 193 </div>
routes 194 </div>
api.php 195 </div>
channels.php 196 </div>
console.php 197 </div>
web.php 198 </div>
outline 199 </div>
npm_scripts 200 </div>

```

```

File Edit Selection View Go Run Terminal Help home.blade.php - Elearning_pariwisata - Visual Studio Code
EXPLORER home.blade.php x
resources > views > home.blade.php > div.d-flex.flex-column-fluid > div.container > div.row.mt-0.mt-lg-3 > div.col-xl-4 > div.card.card-custom.gutter-b.card-stretch > div
css 156 <rect fill="#000000" opacity="0.3" transform="translate(17.825568, 11
js 157 </g>
lang 158 </svg>
sass 159 <!--end::Svg Icon-->
views 160 </span>
auth 161 </div>
layouts 162 </div>
admin.blade.php 163 <!--end::Symbol-->
app.blade.php 164 <!--begin::Title-->
login.blade.php 165 <div>
master.blade.php 166 <div class="font-size-h4 text-dark-75 font-weight-bolder">3</div>
materi 167 <div class="font-size-sm text-muted font-weight-bold mt-1">Bab</div>
create.blade.php 168 </div>
edit.blade.php 169 <!--end::Title-->
index.blade.php 170 </div>
home.blade.php 171 <!--end::Widget Item-->
welcome.blade.php 172 </div>
routes 173 <!--end::Items-->
api.php 174 <!--begin::Chart-->
channels.php 175 <div id="kt_mixed_widget_17_chart" class="card-rounded-bottom data-color="primary" style="height: 200px">
console.php 176 <!--end::Chart-->
web.php 177 </div>
outline 178 <!--end::Body-->
npm_scripts 179 </div>
css 180 </div>
js 181 <!--end::Mixed Widget 17-->
lang 182 </div>
sass 183 </div>
views 184 </div>
auth 185 </div>
layouts 186 </div>
admin.blade.php 187 </div>
app.blade.php 188 </div>
login.blade.php 189 </div>
master.blade.php 190 </div>
materi 191 </div>
create.blade.php 192 </div>
edit.blade.php 193 </div>
index.blade.php 194 </div>
home.blade.php 195 </div>
welcome.blade.php 196 </div>
routes 197 </div>
api.php 198 </div>
channels.php 199 </div>
console.php 200 </div>
web.php 201 </div>
outline 202 </div>
npm_scripts 203 </div>

```

```
File Edit Selection View Go Run Terminal Help welcome.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
resources > views > welcome.blade.php > html > body.anti... > div.relative.flex.items-top.justify-center.min-h-screen.bg-gray-100.dark:bg-gray-900.sm:items-center.sm:pt-0
1 <!DOCTYPE html>
2 <html lang="{{ str_replace('_', '-', app()->getLocale()) }}">
3 <head>
4 <meta charset="utf-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1">
6
7 <title>Elearning Dinas Pariwisata</title>
8
9 <!-- Fonts -->
10 <link href="https://fonts.googleapis.com/css2?family=Nunito:wght@400;600;700&display=swap" rel="stylesheet">
11 <link href="vendor/bootstrap/css/bootstrap.min.css" rel="stylesheet">
12
13 <!-- Custom Fonts -->
14 <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
15 <link href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,700,300italic,400italic,700italic" rel="stylesheet">
16 <link href="vendor/simple-line-icons/css/simple-line-icons.css" rel="stylesheet">
17 <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css" integrity="sh...
18
19 <!-- Custom CSS -->
20 <link href="css/stylish-portfolio.min.css" rel="stylesheet">
21 <!-- Styles -->
22 <style>
23 /*! normalize.css v8.0.1 | MIT License | github.com/necolas/normalize.css */html{line-height:1.15;-webkit-text-
24
25 <style>
26 body {
27 font-family: 'Nunito';
28 }
29 </style>
30 </head>
31 <body class="anti...
32 <div class="relative flex items-top justify-center min-h-screen bg-gray-100 dark:bg-gray-900 sm:items-center sm:pt-0
```

```
File Edit Selection View Go Run Terminal Help welcome.blade.php - Elearning_pariwisata - Visual Studio Code

EXPLORER
resources > views > welcome.blade.php > html > body.anti... > div.relative.flex.items-top.justify-center.min-h-screen.bg-gray-100.dark:bg-gray-900.sm:items-center.sm:pt-0
28 }
29 font-family: 'Nunito';
30 </style>
31 </head>
32 <body class="anti...
33 <div class="relative flex items-top justify-center min-h-screen bg-gray-100 dark:bg-gray-900 sm:items-center sm:pt-0">
34 @if (Route::has('login'))
35 <div class="hidden fixed top-0 right-0 px-6 py-4 sm:block">
36 @auth
37 <a href="{{ url('/home') }}" class="text-sm text-gray-700 underline">Home</a>
38 @else
39 <a href="{{ route('login') }}" class="text-sm text-gray-700 underline">login</a>
40
41 @if (Route::has('register'))
42 <a href="{{ route('register') }}" class="ml-4 text-sm text-gray-700 underline">Register</a>
43 @endif
44 </div>
45 @endif
46 </div>
47 <h1>Selamat Datang</h1>
48 </div>
49 </body>
50 </html>
51
52
```